


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 147.42 lm/W			
MODEL	2835 14*30	Imax(cd)	1357	S/MH(C0/180)	1.30
NOMINAL POWER(W)	34.1	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	5027.0	η UP, DN(C0-180)	5.9, 44.0
NOMINAL FLUX(lm)	5026.95	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	5.6, 44.5
LAMPS INSIDE	1	η up(%)	11.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.2	η down(%)	88.6	CIBSE SHR MAX	1.35

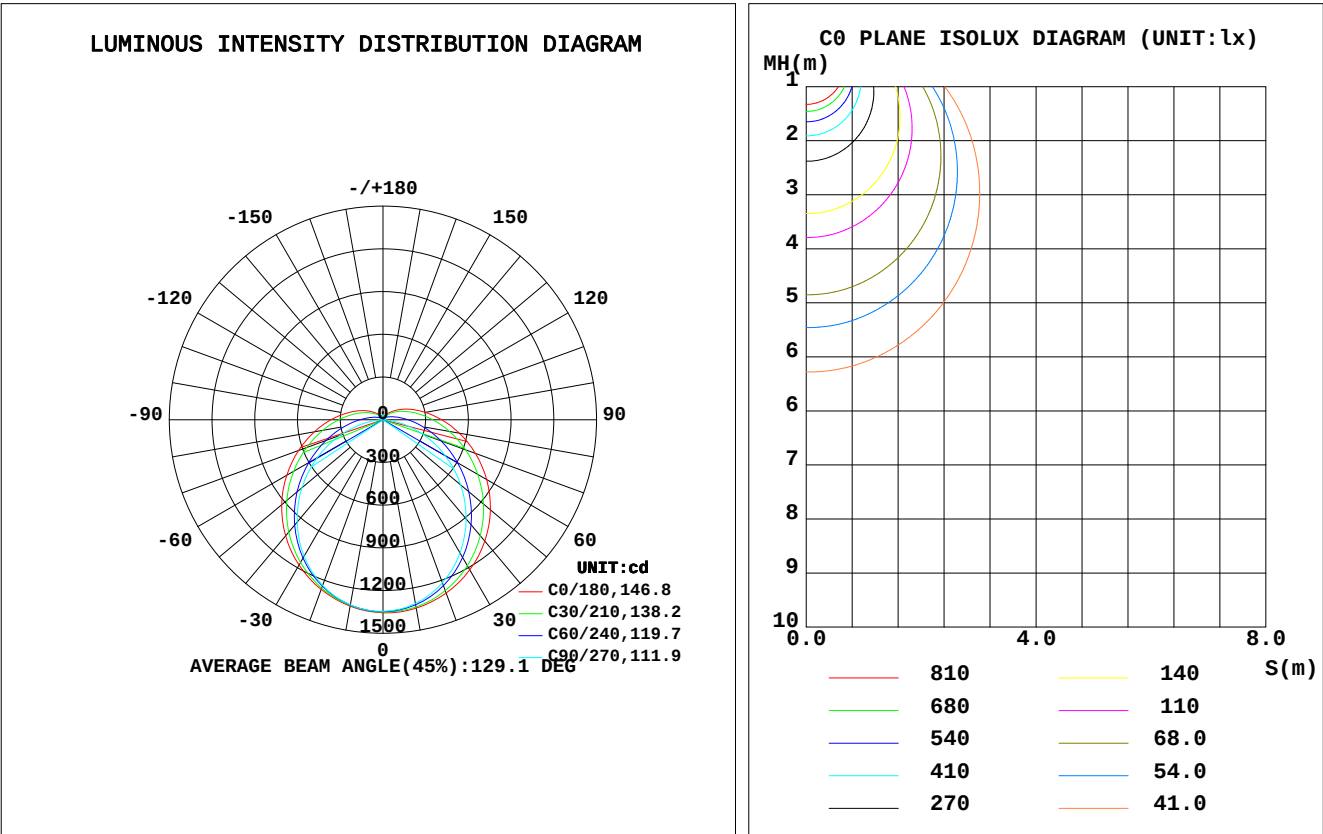

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2026-03-25

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1344	1327	1310	1310	1330	1323	1321	1330	0- 10	127.5	127.5	2.54,2.54
20	1296	1259	1219	1230	1268	1251	1239	1269	10- 20	365.2	492.7	9.8,9.8
30	1218	1151	1082	1114	1179	1140	1108	1167	20- 30	554.7	1047	20.8,20.8
40	1113	1013	908.4	967.6	1064	997.7	938.1	1032	30- 40	674.2	1722	34.2,34.2
50	984.6	854.3	713.8	804.3	929.0	835.0	743.9	874.5	40- 50	713.9	2436	48.5,48.5
60	840.8	686.8	505.9	635.3	781.0	663.6	533.9	705.6	50- 60	677.4	3113	61.9,61.9
70	691.0	525.3	298.6	475.6	630.7	498.7	320.7	540.0	60- 70	579.9	3693	73.5,73.5
80	544.6	380.3	107.1	336.1	488.6	352.8	122.1	390.4	70- 80	447.2	4140	82.4,82.4
90	412.4	263.2	12.67	227.1	365.3	236.6	10.72	268.2	80- 90	312.4	4453	88.6,88.6
100	302.4	178.1	15.08	149.8	264.6	154.7	11.88	179.3	90-100	212.1	4665	92.8,92.8
110	214.8	117.9	17.69	97.98	184.3	100.0	14.09	117.0	100-110	140.3	4805	95.6,95.6
120	147.5	77.86	20.31	65.23	125.5	64.70	16.48	76.29	110-120	88.91	4894	97.4,97.4
130	96.53	51.64	22.88	45.28	80.13	43.60	19.16	49.01	120-130	54.46	4948	98.4,98.4
140	61.71	36.99	25.25	34.58	50.86	32.31	21.97	33.24	130-140	32.91	4981	99.1,99.1
150	41.18	31.66	27.31	30.28	35.48	28.24	24.68	28.49	140-150	20.72	5002	99.5,99.5
160	32.27	30.16	28.89	29.72	30.41	28.19	27.10	28.38	150-160	13.74	5016	99.8,99.8
170	31.00	30.44	29.83	30.46	30.85	29.71	28.98	29.75	160-170	8.389	5024	99.9,99.9
180	31.64	30.77	30.12	30.76	31.69	30.76	30.12	30.75	170-180	2.904	5027	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2026-03-25

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

LUMINANCE LIMITATION CURVES

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

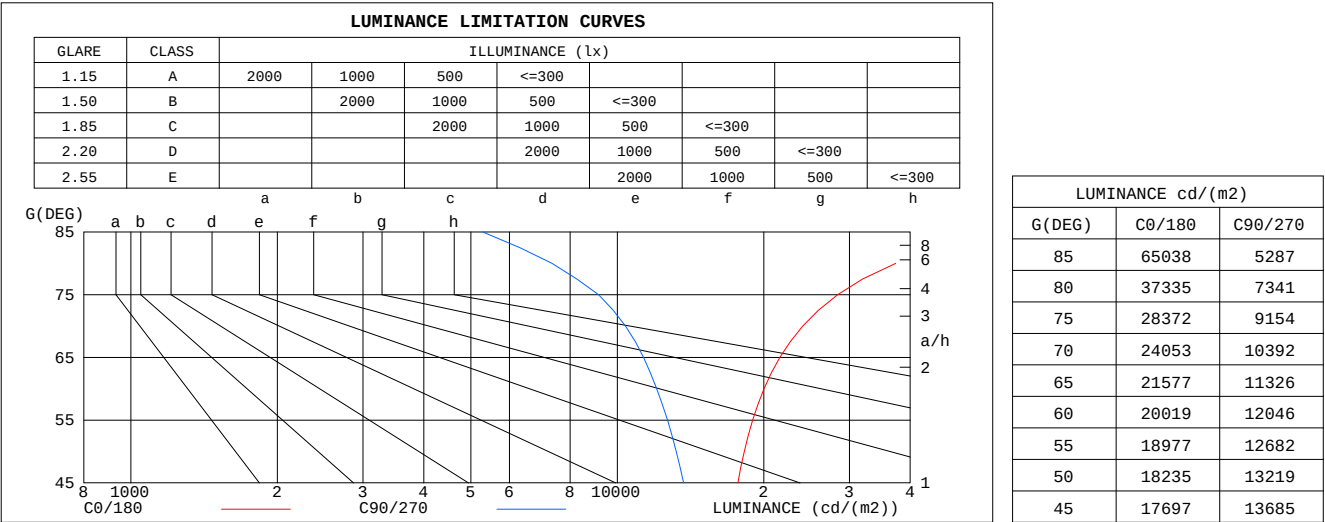


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2026-03-25

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz		
Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

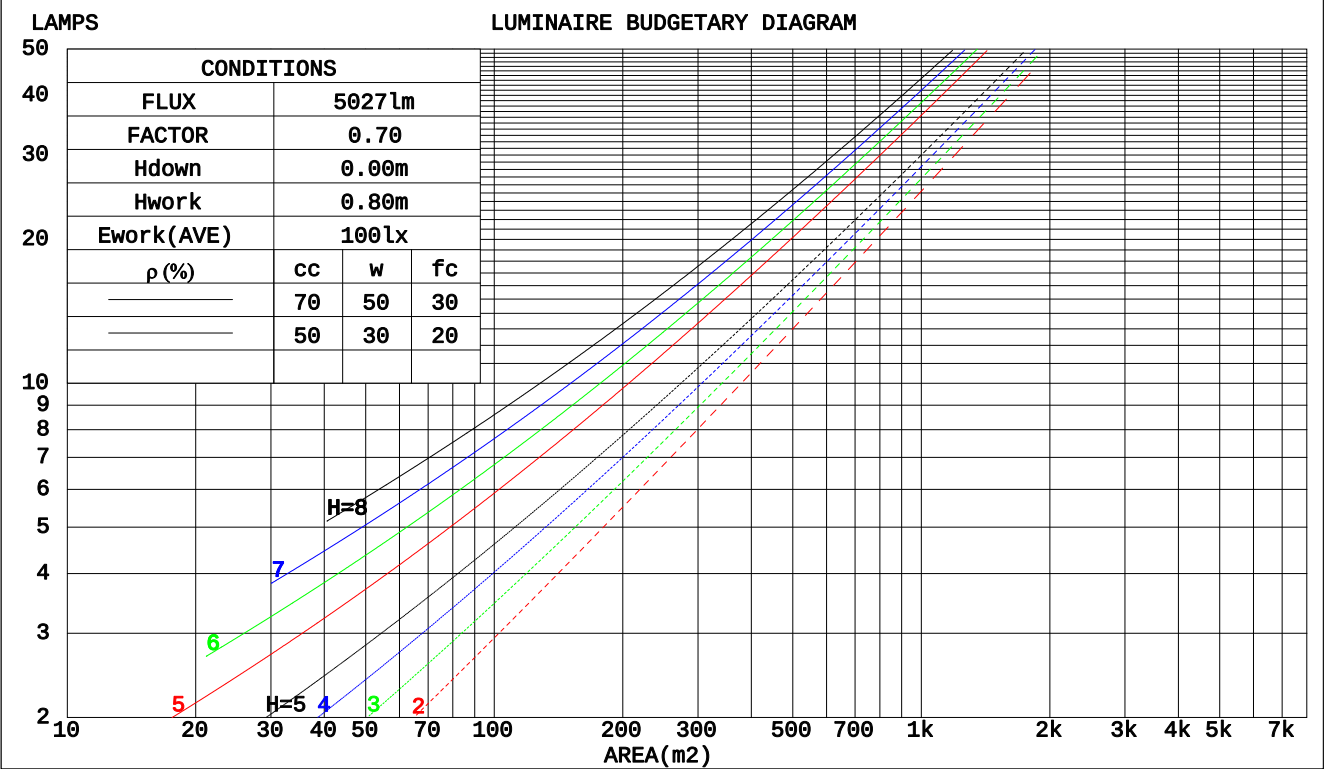

C Range: 0 - 360DEG

C Interval: 30.00DEG

Test Speed: HIGH

Temperature:25DEG

Operators:090003

Test Date:2026-03-25

γ Range: 0 - 180DEG

γ Interval: 2.5DEG

Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446

Humidity:65.0%

Test Distance:7.200m [K=1.0000]

Remarks: 4000K RA80 14*30 2835

WEC AND CCEC

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm								
NAME: LED Tri-proof light				TYPE: 36W 4000K			WEIGHT:	
SPEC.: SL-P69F4-36-W				DIM.: 1200			SERIAL No.: 20260325004	
MFR.: Shinelong Technology Corp., Ltd.				SUR.: 1.2*0.07			Shielding Angle:	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.366	.208	.066	.356	.203	.064	.336	.193	.062	.317	.183	.059	.300	.174	.056	
2.0	.323	.177	.054	.313	.172	.053	.295	.164	.051	.279	.156	.049	.263	.149	.047	
3.0	.289	.154	.046	.281	.150	.045	.265	.143	.044	.250	.137	.042	.236	.130	.040	
4.0	.262	.136	.040	.254	.133	.039	.240	.127	.038	.226	.121	.037	.213	.116	.035	
5.0	.239	.122	.035	.232	.119	.035	.219	.114	.034	.207	.109	.032	.195	.104	.031	
6.0	.220	.110	.032	.213	.108	.031	.201	.103	.030	.190	.099	.029	.180	.095	.028	
7.0	.203	.100	.028	.197	.098	.028	.187	.094	.027	.176	.090	.026	.167	.087	.025	
8.0	.189	.092	.026	.184	.090	.026	.174	.087	.025	.164	.083	.024	.156	.080	.023	
9.0	.176	.085	.024	.171	.084	.023	.162	.080	.023	.154	.077	.022	.146	.074	.021	
10.0	.165	.079	.022	.161	.078	.022	.152	.075	.021	.144	.072	.020	.137	.069	.020	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.278	.278	.278	.237	.237	.237	.162	.162	.162	.093	.093	.093	.030	.030	.030	
1.0	.272	.243	.218	.233	.209	.187	.159	.144	.130	.092	.083	.075	.029	.027	.024	
2.0	.265	.220	.183	.227	.189	.158	.155	.131	.110	.090	.076	.065	.029	.025	.021	
3.0	.257	.203	.160	.220	.175	.139	.151	.122	.098	.087	.071	.058	.028	.023	.019	
4.0	.249	.191	.146	.214	.165	.127	.147	.115	.089	.085	.067	.053	.027	.022	.017	
5.0	.242	.180	.135	.207	.156	.118	.143	.109	.083	.083	.064	.049	.027	.021	.016	
6.0	.234	.172	.128	.201	.149	.112	.139	.105	.079	.081	.061	.047	.026	.020	.015	
7.0	.227	.166	.123	.195	.144	.107	.135	.101	.076	.078	.059	.045	.025	.019	.015	
8.0	.220	.160	.119	.190	.139	.103	.131	.097	.073	.076	.057	.044	.025	.019	.014	
9.0	.214	.155	.115	.185	.135	.101	.128	.095	.071	.074	.056	.043	.024	.018	.014	
10.0	.208	.151	.113	.180	.131	.098	.125	.092	.070	.073	.055	.042	.024	.018	.014	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.200m [K=1.0000]
 Remarks: 4000K RA80 14*30 2835

UGR(Unified Glare Rating) Table

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm										
NAME: LED Tri-proof light					TYPE: 36W 4000K			WEIGHT:		
SPEC.: SL-P69F4-36-W					DIM.: 1200			SERIAL No.: 20260325004		
MFR.: Shinelong Technology Corp., Ltd.					SUR.: 1.2*0.07			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.0	23.4	22.5	23.9	24.5	19.3	20.8	19.8	21.3	21.9
3H	24.7	26.1	25.3	26.6	27.2	21.0	22.3	21.5	22.9	23.5
4H	26.1	27.4	26.7	27.9	28.6	21.6	22.8	22.1	23.4	24.0
6H	27.6	28.8	28.2	29.4	30.0	22.0	23.1	22.5	23.7	24.4
8H	28.4	29.5	29.0	30.1	30.8	22.1	23.2	22.6	23.8	24.4
12H	29.3	30.4	29.9	31.0	31.7	22.1	23.2	22.7	23.8	24.5
4H 2H	22.5	23.8	23.1	24.3	25.0	20.4	21.6	20.9	22.2	22.8
3H	25.6	26.7	26.1	27.3	27.9	22.3	23.4	22.9	24.0	24.7
4H	27.2	28.2	27.8	28.8	29.5	23.1	24.1	23.7	24.7	25.4
6H	28.9	29.8	29.5	30.4	31.1	23.7	24.6	24.3	25.2	25.9
8H	29.9	30.7	30.5	31.3	32.0	23.8	24.7	24.5	25.3	26.0
12H	30.9	31.7	31.6	32.3	33.1	23.9	24.7	24.6	25.4	26.1
8H 4H	27.5	28.4	28.2	29.0	29.7	24.1	24.9	24.7	25.6	26.3
6H	29.6	30.3	30.2	30.9	31.7	25.0	25.7	25.7	26.4	27.1
8H	30.7	31.4	31.4	32.0	32.8	25.4	26.0	26.0	26.7	27.4
12H	32.0	32.6	32.7	33.3	34.1	25.6	26.2	26.3	26.8	27.6
12H 4H	27.6	28.3	28.2	29.0	29.7	24.4	25.2	25.1	25.8	26.6
6H	29.7	30.3	30.4	31.0	31.8	25.5	26.2	26.2	26.8	27.6
8H	30.9	31.5	31.6	32.2	33.0	26.1	26.6	26.7	27.3	28.1
CIE190: 2010										

CIE190: 2010
Area: 0.084 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 γ Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

UTILIZATION FACTORS TABLE

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	51	39	32	50	39	32	49	38	31	25
0.80	61	48	40	59	47	40	57	46	39	32
1.00	68	56	48	67	55	48	64	56	47	39
1.25	75	63	55	73	62	55	70	60	53	45
1.50	80	69	61	78	68	60	74	65	58	49
2.00	87	77	69	85	75	68	80	72	66	56
2.50	92	82	75	89	80	73	84	76	71	60
3.00	95	87	80	92	85	78	87	80	75	63
4.00	100	93	86	97	90	84	90	85	81	68
5.00	103	96	91	99	94	89	93	88	84	71
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 γ Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.200m [K=1.0000]
 Remarks: 4000K RA80 14*30 2835

ISOCANDELA DIAGRAM


Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

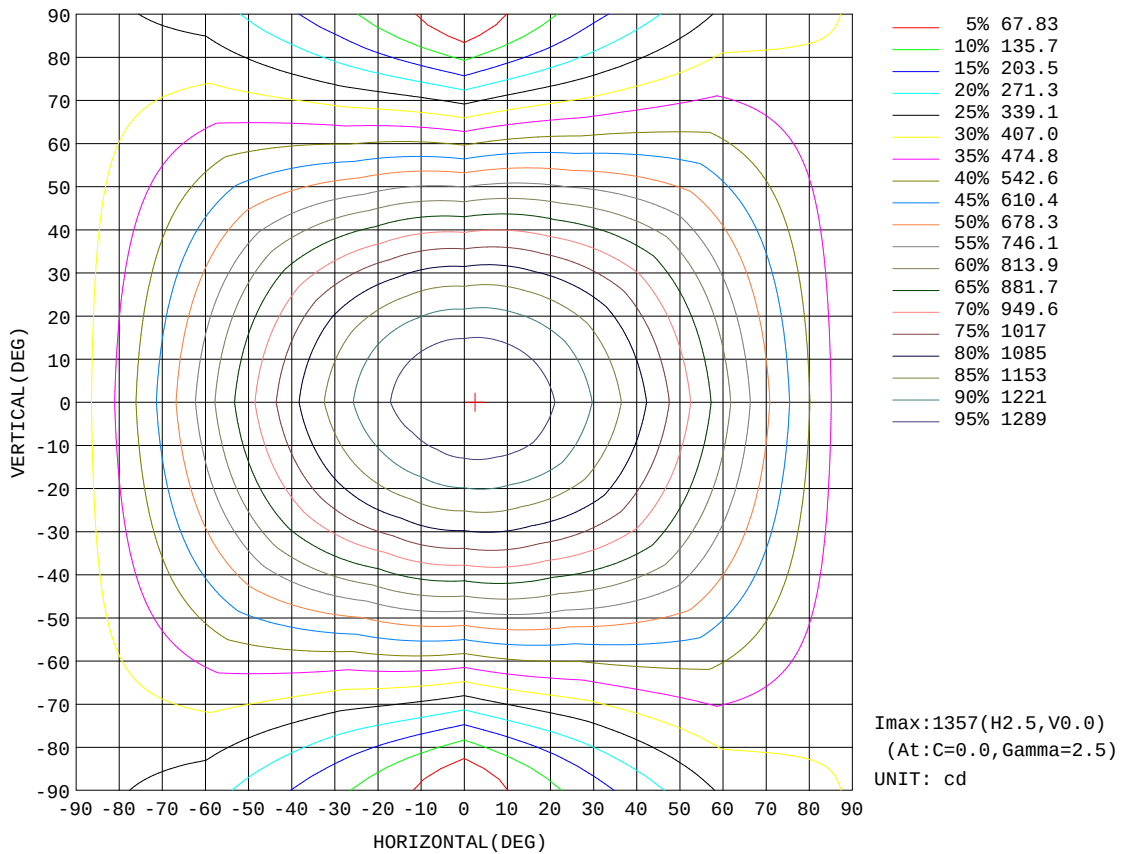

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 30.0DEG	γ Interval: 2.5DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Temperature:25DEG	Humidity:65.0%
Operators:090003	Test Distance:7.200m [K=1.0000]
Test Date:2026-03-25	Remarks: 4000K RA80 14*30 2835

AAI Figure

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

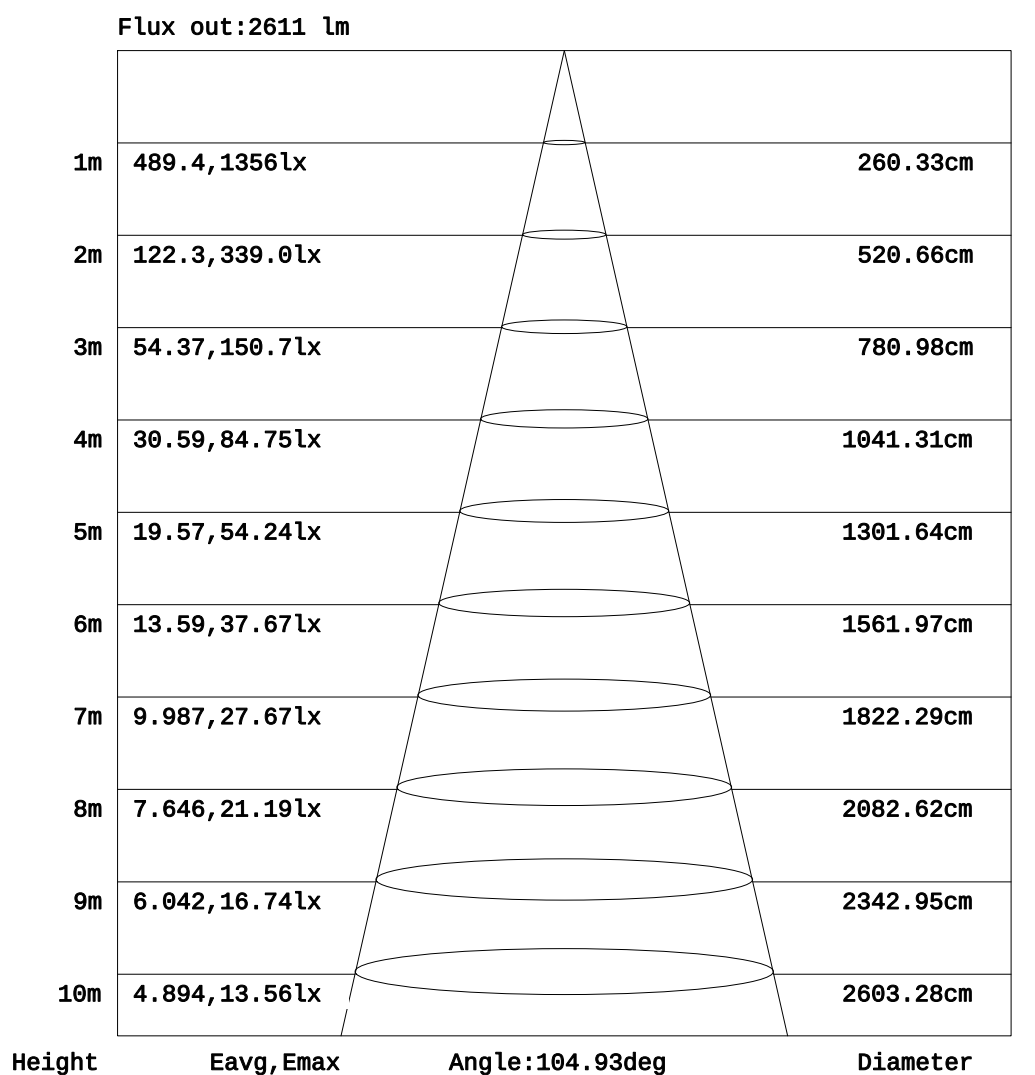


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 090003
Test Date: 2026-03-25

γ Range: 0 - 180DEG
γ Interval: 2.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

ISOLUX DIAGRAM

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:

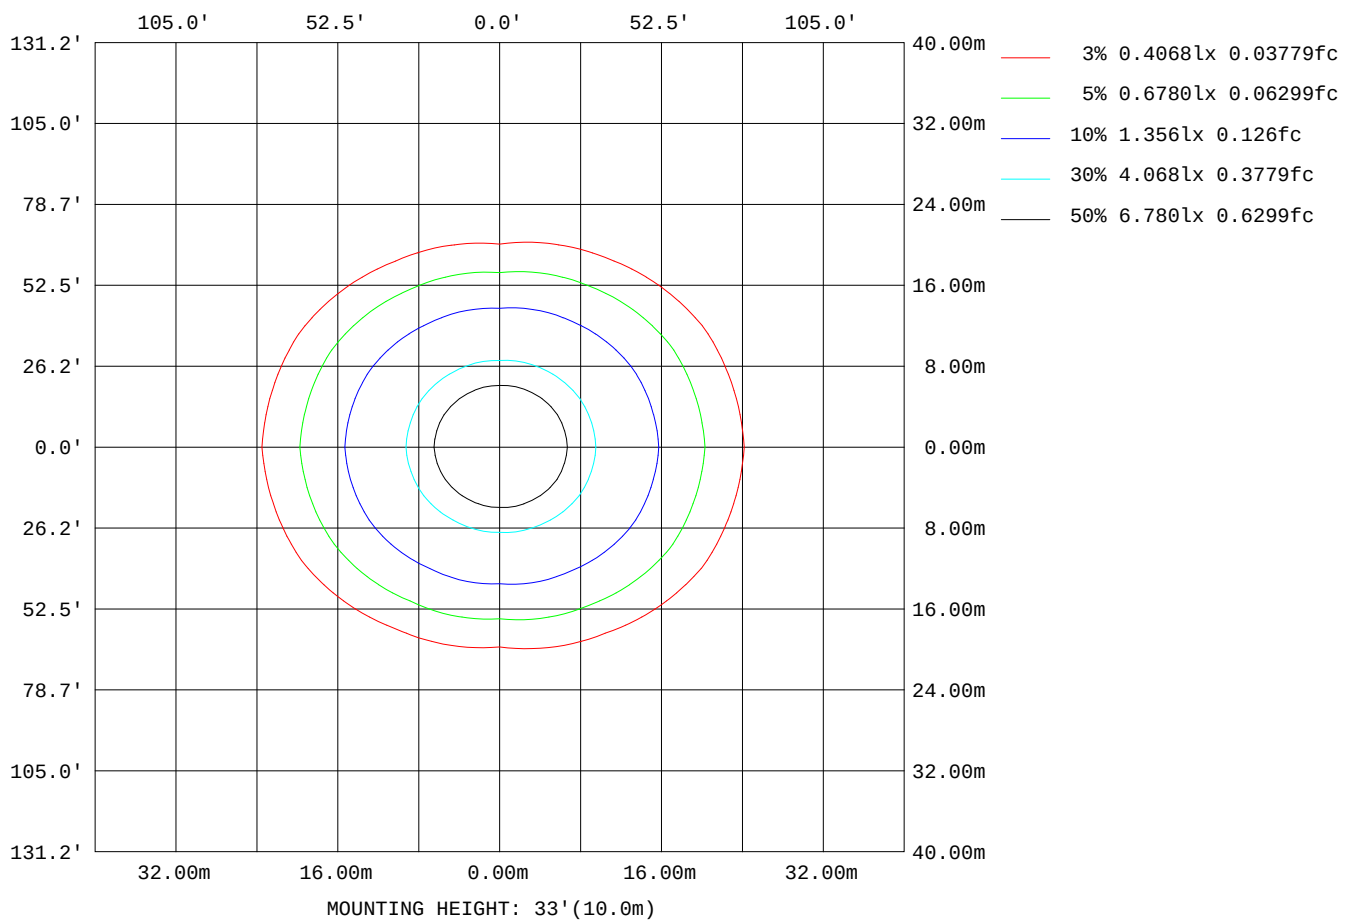

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:090003
Test Date:2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 γ Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

LED Avg.L Report

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm		
NAME: LED Tri-proof light	TYPE: 36W 4000K	WEIGHT:
SPEC.: SL-P69F4-36-W	DIM.: 1200	SERIAL No.: 20260325004
MFR.: Shinelong Technology Corp., Ltd.	SUR.: 1.2*0.07	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	20723
L_0~180(75)av	27019
L_0~180(85)av	61497
L_90~270(65)av	11676
L_90~270(75)av	9570
L_90~270(85)av	5780
L_45(65)av	16666
L_45(75)av	20191
L_45(85)av	42366

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:090003
 Test Date:2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.200m [K=1.0000]
 Remarks: 4000K RA80 14*30 2835

Planar Illuminance Curve

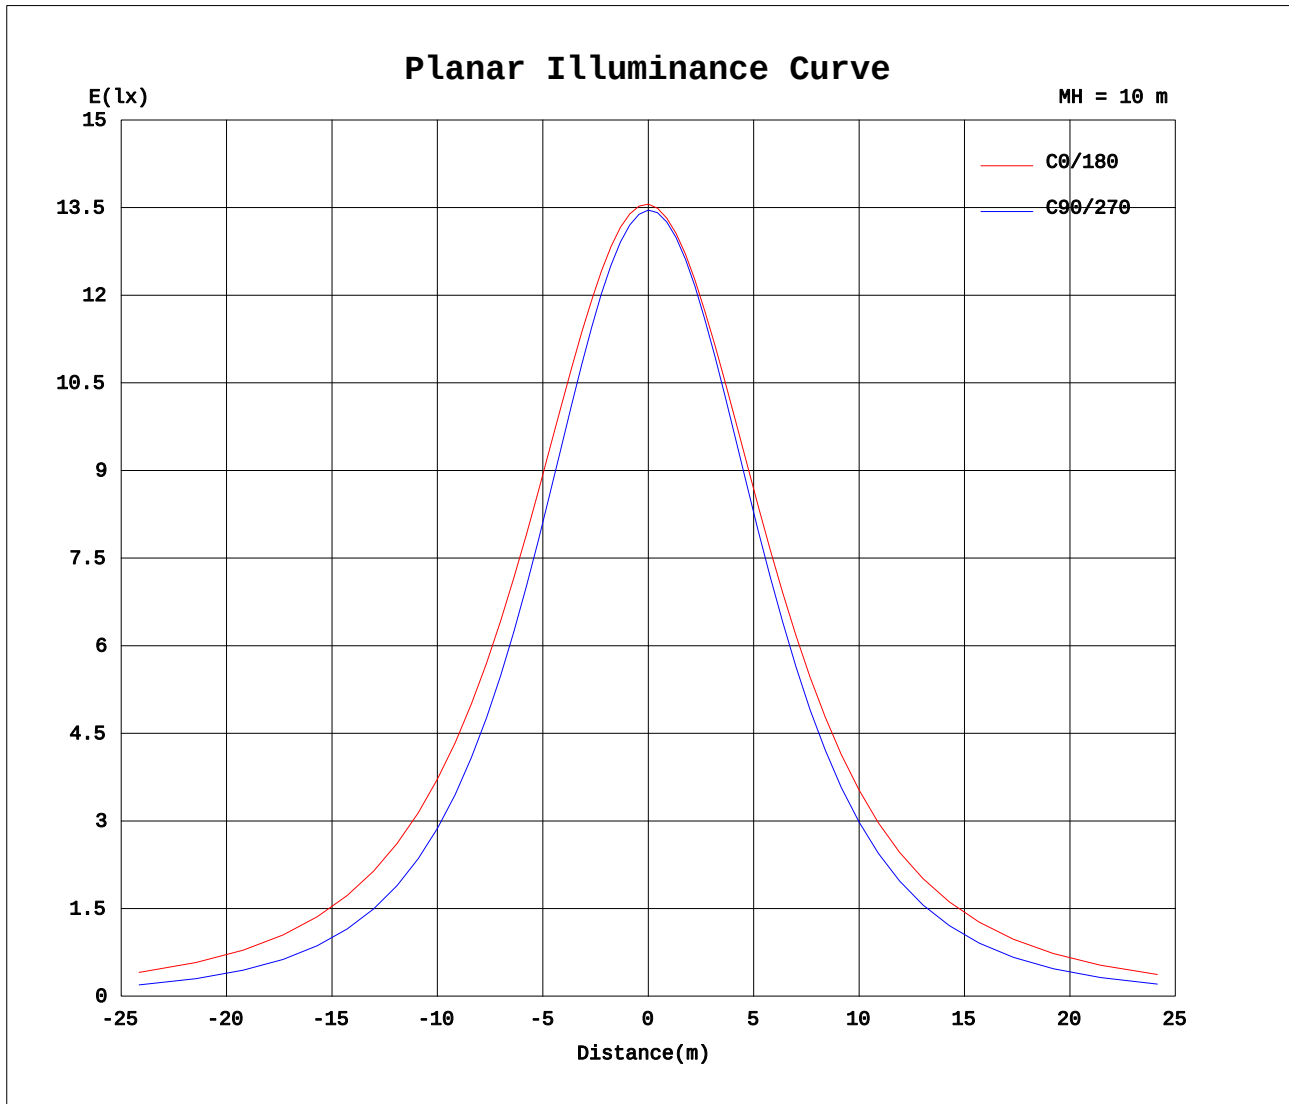

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: 090003
Test Date: 2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: 4000K RA80 14*30 2835

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.40V I:0.1580A P:34.100W PF:0.9770 Freq:50.00Hz Lamp Flux:5026.95x1 lm																	
NAME: LED Tri-proof light									TYPE: 36W 4000K						WEIGHT:		
SPEC.: SL-P69F4-36-W									DIM.: 1200						SERIAL No.: 20260325004		
MFR.: Shinelong Technology Corp., Ltd.									SUR.: 1.2*0.07						Shielding Angle:		

Table--1

UNIT: cd

C(DEG) γ (DEG)		0	30	60	90	120	150	180	210	240	270	300	330						
0		1356	1351	1348	1346	1345	1344	1356	1351	1348	1346	1345	1344						
5		1355	1348	1341	1336	1333	1333	1348	1343	1342	1341	1343	1344						
10		1344	1335	1320	1310	1307	1312	1330	1325	1322	1321	1327	1333						
15		1323	1311	1286	1272	1269	1281	1303	1296	1289	1287	1299	1311						
20		1296	1277	1240	1219	1220	1241	1268	1258	1244	1239	1258	1280						
25		1261	1235	1184	1156	1160	1193	1227	1212	1189	1178	1206	1239						
30		1218	1185	1118	1082	1090	1137	1179	1158	1123	1108	1143	1191						
35		1169	1127	1044	998	1013	1075	1124	1097	1047	1027	1071	1135						
40		1113	1063	962	908	929	1006	1064	1030	966	938	991	1072						
45		1051	994	876	813	841	934	999	958	878	843	907	1004						
50		985	922	787	714	750	859	929	882	788	744	818	931						
55		914	846	696	611	658	781	856	804	695	640	726	855						
60		841	768	605	506	567	703	781	725	602	534	634	778						
65		766	692	517	402	480	627	705	647	512	427	543	700						
70		691	617	434	299	398	553	631	571	426	321	456	623						
75		617	544	356	199	323	483	558	498	347	217	376	549						
80		545	474	286	107	256	416	489	430	275	122	302	478						
85		476	409	226	38.7	199	356	424	368	215	45.9	239	413						
90		412	350	176	12.7	152	302	365	311	162	10.7	184	352						
95		354	297	136	13.8	116	254	312	261	122	10.9	141	298						
100		302	250	106	15.1	87.9	212	265	217	92.2	11.9	108	250						
105		256	209	82.1	16.4	67.8	174	223	179	69.8	13.0	83.2	208						
110		215	171	64.5	17.7	52.6	143	184	147	53.1	14.1	63.2	171						
115		179	141	50.0	19.0	42.3	117	153	120	41.7	15.3	50.0	134						
120		148	115	40.6	20.3	35.3	95.2	126	95.6	33.8	16.5	38.5	114						
125		120	92.4	34.7	21.6	30.9	76.7	101	76.3	28.6	17.8	31.0	85.9						
130		96.5	71.9	31.4	22.9	28.5	62.1	80.1	61.3	25.9	19.2	27.1	70.9						
135		77.5	56.1	29.5	24.1	27.4	50.6	64.5	49.5	24.5	20.6	25.2	53.8						
140		61.7	45.3	28.7	25.3	27.1	42.1	50.9	40.5	24.2	22.0	24.6	41.8						
145		49.5	38.9	28.4	26.3	27.2	36.4	41.6	34.8	24.5	23.4	24.9	35.3						
150		41.2	34.8	28.5	27.3	27.8	32.8	35.5	31.2	25.3	24.7	25.6	31.3						
155		35.5	32.3	28.9	28.2	28.5	30.9	32.0	29.4	26.4	25.9	26.7	29.5						
160		32.3	31.0	29.3	28.9	29.2	30.2	30.4	28.9	27.5	27.1	27.7	29.1						
165		31.0	30.6	29.8	29.4	29.8	30.4	30.2	29.3	28.5	28.1	28.6	29.5						
170		31.0	30.7	30.2	29.8	30.2	30.7	30.8	30.0	29.4	29.0	29.4	30.1						
175		31.4	31.0	30.5	30.1	30.4	31.0	31.4	30.6	30.1	29.6	30.0	30.6						
180		31.6	31.0	30.5	30.1	30.5	31.1	31.7	31.0	30.5	30.1	30.5	31.0						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: 090003
 Test Date: 2026-03-25

γ Range: 0 - 180DEG
 γ Interval: 2.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 7.200m [K=1.0000]
 Remarks: 4000K RA80 14*30 2835