



SPECIFICATION

Expert T5



Product Details

S/N Rules

$\frac{SL}{1} - \frac{T6}{2} \frac{X}{3} \frac{X}{4} \frac{XX}{5} - \frac{XXX}{6} - \frac{X}{7}$

EX: $\frac{SL}{1} - \frac{T65F22}{2345} - \frac{260}{6} - \frac{P}{7}$

1. SL - ShineLong
- 2 T6: Internal driver tube with G5 caps
3. X - Size: 1 = 1ft; 2 = 2ft...
- 4: X - Cover Type (S: Striped cover, F :Frosted cover, T :Transparent cover)
5. XX - Watt: 10=10w; 20=20w; 25=25w(according to actual watt)
6. 260 :260PCS LED(Number of leds)
7. X - CCT: P=pure white; W=warm white; C=cool white;

Application

- | | |
|--------------------|-------------|
| ➤ Offices | ➤ factories |
| ➤ libraries | ➤ subway |
| ➤ shops / The mall | ➤ The hotel |

Features

- CE, RoHS certified
- Mitsubishi PC cover+AL housing
- ±90° rotated caps, 94V0 fire resistance
- Isolated driver with double insulating bush, Rubycon capacitors inside
- Free of risk, 100% insulation test and sampling hi-pot test before delivery
- Efficiency options: 120lm/w , 140lm/w
- L80B50(Ta=25°C) : 70,000hrs
- 7 year warranty

Temperature

Operating: -20 ~ +50°C
Storage: -40 ~ +85°C




Product Details



Dimension

T5 IEC60081 Length Standard

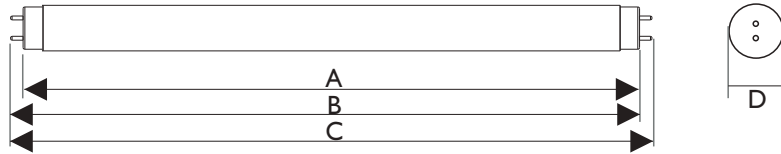

length	A		B	C	D
	Min.mm	Min.mm	Max.mm	Min.mm	Min.mm
600	549.0	553.7	556.1	563.2	23.5
1200	1149.0	1153.7	1156.1	1163.2	23.5
1500	1449.0	1453.7	1456.1	1463.2	23.5

Data Sheet

Article Number	Size	Power	LEDs	Beam Angle	CRI	AC Input	DC Output	SDCM	Efficiency(±5%)	Lumen Output
----------------	------	-------	------	------------	-----	----------	-----------	------	-----------------	--------------

Standard Lumen Version

SL-T62X10-108-X	549x23.5mm	10W	117	120°	>80	100~240V	30~40V	<3	120lm/w	1150~1250lm
SL-T64X20-240-X	1149x23.5mm	20W	234	120°	>80	100~240V	30~40V	<3	120lm/w	2300~2500lm
SL-T65X20-264-X	1449x23.5mm	25W	286	120°	>80	100~240V	30~40V	<3	120lm/w	3875~3125lm
SL-T65X25-288-X	1449x23.5mm	30W	312	120°	>80	100~240V	30~40V	<3	120lm/w	3450~3750lm


High Lumen Version

SL-T62X10-108-X	549x23.5mm	10W	117	120°	>80	100~240V	30~40V	<3	140lm/w	1350~1450lm
SL-T64X20-240-X	1149x23.5mm	20W	234	120°	>80	100~240V	30~40V	<3	140lm/w	2700~2900lm
SL-T65X20-264-X	1449x23.5mm	25W	286	120°	>80	100~240V	30~40V	<3	140lm/w	3375~3625lm
SL-T65X25-288-X	1449x23.5mm	30W	312	120°	>80	100~240V	30~40V	<3	140lm/w	4050~4350lm

Different wattage can be customized


! WARNING!

- * Switch off the power before replacement.
- * Remove the ballast or starter before installation.
- * Indoor use only.

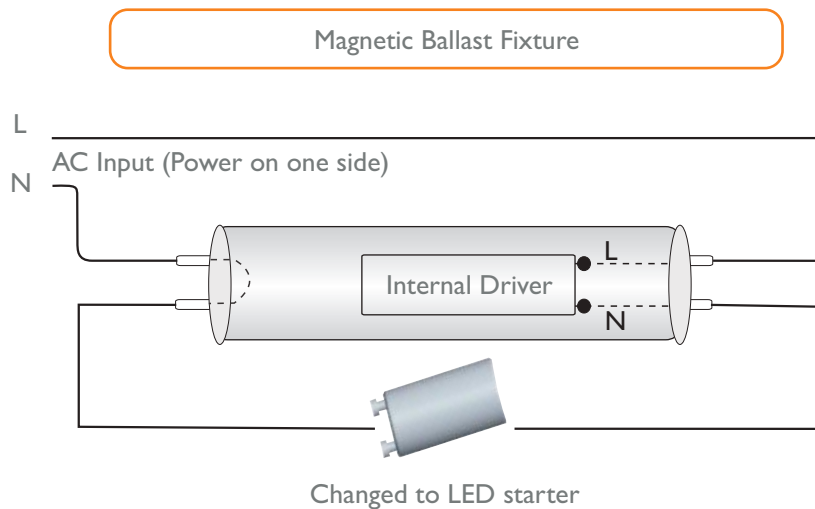

Package

Article Number	Size	Carton Size	N.W./CTN	G.W./CTN	Maximum Loading of		
					20'GP	40'GP	40'HQ
SL-T62X10-108-X	549x23.5mm	610*190*195mm	3.5kg	5kg	360CTNs	750CTNs	913CTNs
SL-T64X20-240-X	1149x23.5mm	1210*190*195mm	6kg	8kg	266CTNs	557CTNs	639CTNs
SL-T65X20-264-X	1449x23.5mm	1510*190*195mm	8kg	10kg	201CTNs	412CTNs	500CTNs
SL-T65X25-288-X	1449x23.5mm	1510*190*195mm	8kg	10kg	168CTNs	357CTNs	399CTNs

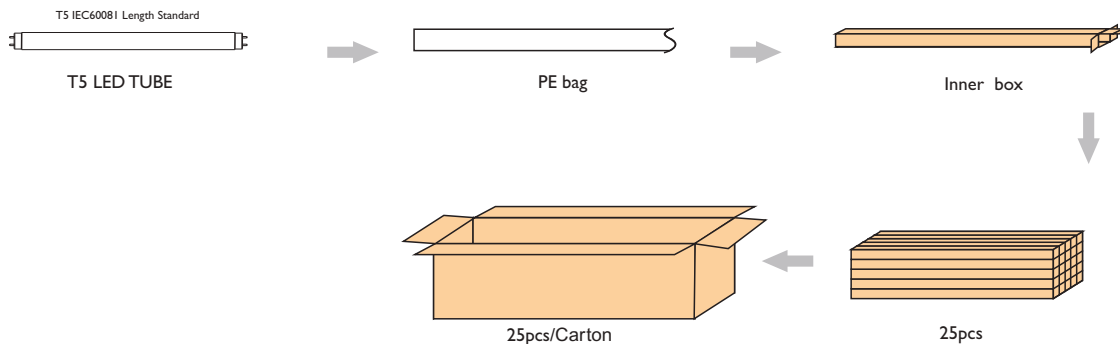

All the above information is subject to the final interpretation of ShineLong Technology.