



SPECIFICATION

T5 Integrated LED Tube

Product Details

S/N Rules

$\frac{SL}{1} - \frac{T5}{2} \frac{X}{3} \frac{X}{4} \frac{X}{5} - \frac{XXX}{6} - \frac{X}{7} \frac{X}{8}$

EX: $\frac{SL}{1} - \frac{T52}{234} \frac{T}{5} \frac{10}{6} - \frac{54}{7} - \frac{P}{8} \frac{T}{8}$

1. SL-ShineLong
2. T5: T5 Integrated Tube
3. X-Size: 1 = 1ft; 2 = 2ft...
4. X-Cover Type (F: Frosted cover; T: Transparent cover)
5. XX-Watt: 08=8w; 11=11w; 30=30w (according to actual watt)
6. 54 : LED Quantity 54PCS
7. X-CCT: P=pure white; W=warm white; C=cool white
8. T: Integrated tube series

Application

- | | |
|--------------------|-------------|
| ➤ Offices | ➤ factories |
| ➤ libraries | ➤ subway |
| ➤ shops / The mall | ➤ The hotel |

Features

- CE RoHs certified
- Integrated structure with build-in driver, aluminum housing + PC housing
- High efficiency 100~110lm/w
- Easy installation and replacement, able to be connected into series
- 3 years warranty

Temperature

Operating: -20 ~ +50°C


Storage: -40 ~ +85°C



Product Details



Dimension

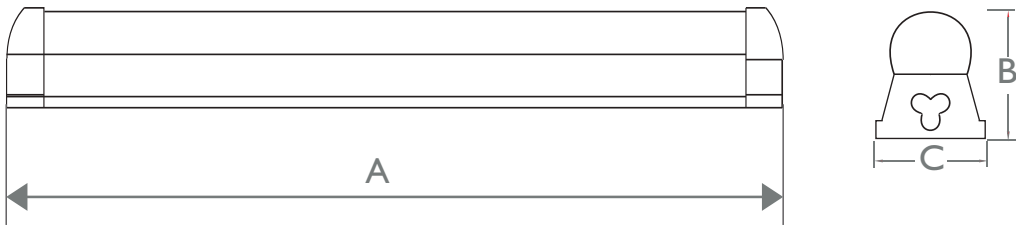

length	A		B	C
———	Min.mm	Min.mm	Max.mm	Min.mm
600	568.8	36.5	37.5	23.0
900	868.8	36.5	37.5	23.0
1200	1168.8	36.5	37.5	23.0
1500	1468.8	36.5	37.5	23.0


Data Sheet

Article Number	Size	Power	LEDs	Beam Angle	CRI	AC Input	DC Output	SDCM	Efficiency(±5%)	Lumen Output
SL-T52X-10-54-XT	600mm	10W	54	120°	>80	100~240V/100~277V	50~60V	<4	95~105lm/w	900~1000lm
SL-T53X-15-72-XT	900mm	15W	72	120°	>80	100~240V/100~277V	70~80V	<4	100~110lm/w	1400~1600lm
SL-T54X-20-120-XT	1200mm	20W	120	120°	>80	100~240V/100~277V	70~80V	<4	100~110lm/w	1900~2100lm
SL-T55X-25-144-XT	1500mm	25W	144	120°	>80	100~240V/100~277V	70~80V	<4	100~110lm/w	2400~2600lm

Different wattage can be customized

Package

Item code	Carton Size	N.W.(kg)/CTN	G.W.(kg)/CTN	Maximum Loading of		
				20'GP	40'GP	40'HQ
SL-T52X10-54-XT	680*510*200	10	17	413CTNs	857CTNs	1202CTNs
SL-T53X12-72-XT	980*510*200	13	23	288CTNs	618CTNs	670CTNs
SL-T54X20-120-XT	1280*510*200	20	30	225CTNs	473CTNs	533CTNs
SL-T55X25-144-XT	1580*510*200	21.5	35	187CTNs	391CTNs	432CTNs

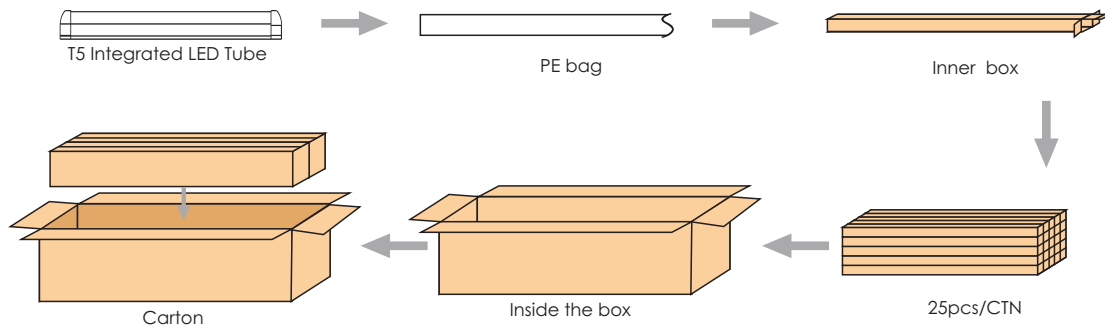

All the above information is subject to the final interpretation of ShineLong Technology.