

SPECIFICATION

UFO LED High Bay Light

Product Details

S/N Rules

$\frac{SL}{1} - \frac{U65}{2} \frac{X}{3} \frac{X}{4} - \frac{XX}{5} - \frac{X}{6}$

EX: $\frac{SL}{1} - \frac{U65BD}{2} - \frac{60}{34} - \frac{X}{5} - \frac{X}{6}$

- 1: SL-ShineLong
- 2: U65: U-UFO LED High Bay Light Version; 65-IP65
- 3: X-Cover Color(B: Black; S: Silver)
- 4: X-Lamp Beads Type(D: 3030 light source; E: Imitation lumens)
- 5: XXX-Power consumption(60: 60w; 80: 80w; 120: 120w; 150:150w; 200: 200w)
- 6: X-Color Temperature(W: Warm white; P: Pure white; C: Cold white)

Application

- Factory
- Warehouse
- Exhibition
- Supermarket
- Mine
- Gas station
- Stadium
- Logistics Distribution Centre

Features

- Unique patent design,CE, ROHS listed
- Meets EMC requirements, no RF Interference.
- High luminous efficiency 110~120LM/W
- Light alloy material and High-tech Coating leads great Anti-corrosion performance.
- High CRI, CCT optional.
- UFO appearance design with small size.
- Wide Alu PCB ensures high efficient heat disipation.
- 3 years warranty

Temperature

Operating: -20 ~ +50°C

Storage: -40 ~ +85°C



Product Details



Integrated Radiator

AL1070 integrated radiator design, with large size PCB, excellent performance of heat dissipation. Small volume, Low weight.



3030 Light Source

Large Chip Size, Anti-sulfide processing, Stable Lighting Performance, Long Lifespan, with LM80.



Junk ring

Waterproof ring

Reflect ring

UFO Unique Design, IP65 Protection


Double layers silicone pad and yellow metal plate to make sure the lamp IP65 grade.




Hook Installation

Hook connector ensures convenient and firm installation.


Dimension

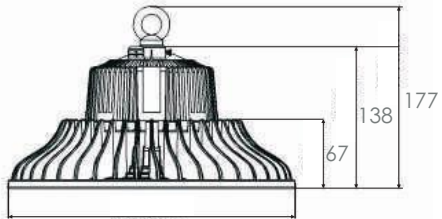


280
SL-U65BD-60-X

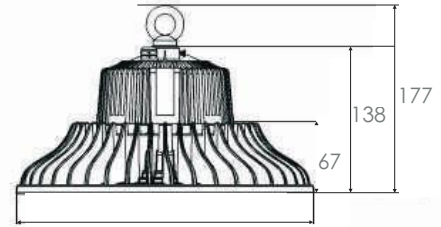


280
SL-U65BD-80-X

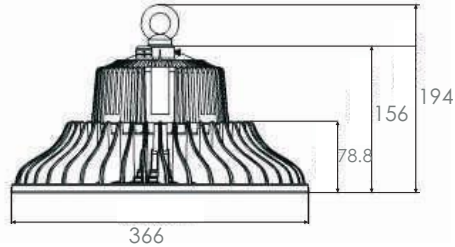

366
SL-U65BD-120-X

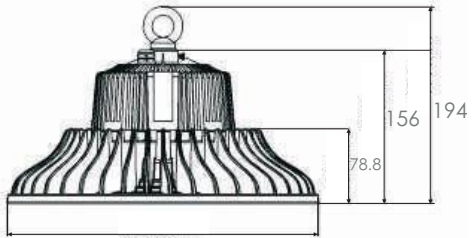

366
SL-U65BD-150-X


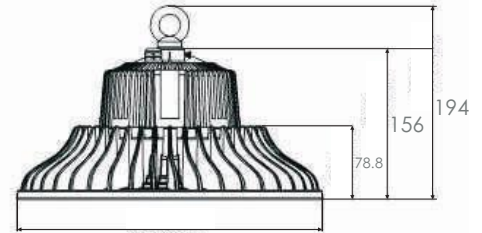


366
SL-U65BD-200-X

Data Sheet

Article Number	Size	Power	Beam Angle	CRI	AC Input	DC Output	Efficiency (±5%)	Lumen Output
SL-U65BD-60-X	330*195*330mm	60W	120°	>80	100-240V/100-277V	DC30-40V	110-120LM/W	6600-7200LM
SL-U65BD-80-X	330*195*330mm	80W	120°	>80	100-240V/100-277V	DC30-40V	110-120LM/W	8800-9600LM
SL-U65BD-120-X	330*195*330mm	120W	120°	>80	100-240V/100-277V	DC30-40V	115-125LM/W	13800-15000LM
SL-U65BD-150-X	425*425*225mm	150W	120°	>80	100-240V/100-277V	DC30-40V	115-125LM/W	17250-18750LM
SL-U65BD-200-X	425*425*225mm	200W	120°	>80	100-240V/100-277V	DC30-40V	115-125LM/W	23000-25000LM

Installation

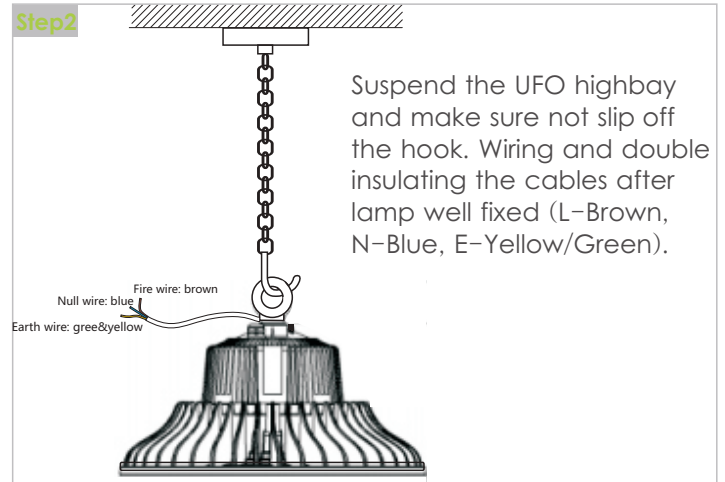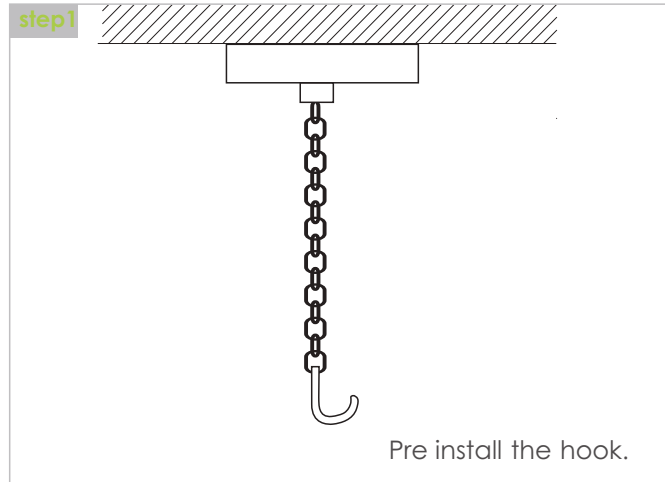

Step3 Turn on the lights after final inspection to confirm function is good.

Package

Item code	Dimension	PCS/Box	N.W. (kg) /PC	G. W. (kg) /CTN	Maximum Loading of		
					20'GP	40'GP	40'HC
SL-U65BD-60-X	330*195*330mm	1PC	3.4	5.8	1519PCS	3087PCS	3528PCS
SL-U65BD-80-X	330*195*330mm	1PC	3.4	5.8	1519PCS	3087PCS	3528PCS
SL-U65BD-120-X	330*195*330mm	1PC	4.1	6.9	1519PCS	3087PCS	3528PCS
SL-U65BD-150-X	425*425*225mm	1PC	4.1	6.9	770PCS	1630PCS	1878PCS
SL-U65BD-200-X	425*425*225mm	1PC	4.1	6.9	770PCS	1630PCS	1878PCS