ShineLong®

13+ YEARS experience

Independent Innovation
LED Lighting Manufacturer


Responsibility, Honesty, Service and Value.

Listed Company


Quality Defender

ISO 9001:2015 ISO 14001:2015 ISO 45001:2018 BSCI FDA SGS

©2010-2023 ShineLong Technology. All rights reserved.

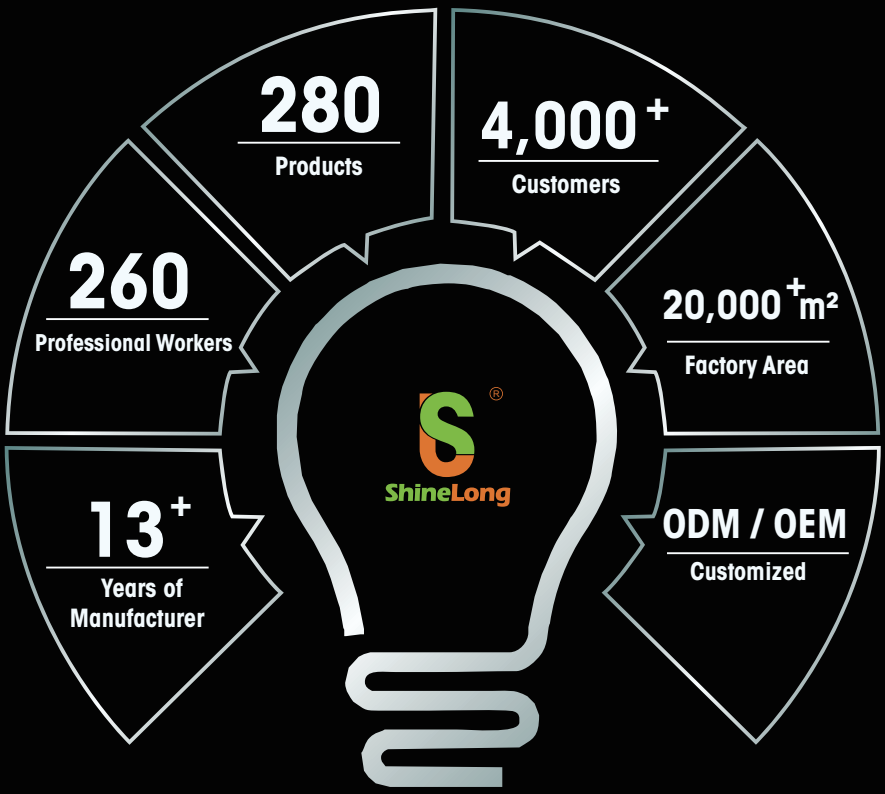
280
Products
4,000+
Customers
260
Professional Workers
20,000+m²
Factory Area
ShineLong
13+
Years of
Manufacturer
ODM / OEM
Customized





TIMELINE
HISTORICAL BACKGROUND

2010

Company Establishment

2011

Started to develop tri-proof products and possessed patent

2013

Vendor of World Famous Brand Vending Machine Lighting System

2015

Factory Expansion 10,000+ m² new site

2016

Successfully application for listing, injecting new impetus into the company's development.

2018

Customized products, including under cabinet light, mirror light, video light, emergency light,etc

2019

Developed smart fixtures,like WIFI, bluetooth, RF and PIR functions. To upgrade products and develop more functions in the future

2020

In 2020, ShineLong and Shenzhen facility agriculture industry association drafted the standard for the technical specification of swine lighting.

2021

In 2021, ShineLong and Shenzhen facility agriculture industry association drafted the standard for the technical specification of cattle lighting.

2022

In 2022, ShineLong was rated as one of the "Top Ten Outstanding" enterprises in the bio-illumination industry .

Products Catalog

LED TRI-PROOF LIGHT

Parkade EU&AU 04
Parkade US 05
Rancher IP69K 06
Rancher IP66 07
Eco-Rancher IP66 08
Rancher Mini 09
Rancher Eco Mini 10
Gauls 11
Alpha 12
Eco Alpha 13
Eco Mini II 14

LED PANEL LIGHT

Slice Panel Light 15
Intact Panel Light 16
CCT Internal Driver Panel Light 17
Slim LED Panel Light 18
Back-lit Panel Light 19
Advertising Panel Light 20
Disc Round Panel Light 21
Disc Round Ceiling Light 22

Commercial Lighting

LED Batten Light 23
LED Slimbay Light 24
Single Slimbay Light 25
K-lens Linear Light 26
LED Linear Light 27
LED Linear Light L Lens 28
Mega High Bay 29
Single High Bay 30
Security Light 31

LED TUBE

Expert T8 LED Tube 32
Expert T8 LED Tube(CE) 33
Expert T6 LED Tube 34
T5 Batten Light 35

Outdoor Lighting

UFO High Bay 36
LED Flood Light 37
Arealux Stadium Light 38

Control System

Smart Control System 39





SL-A65X2-20-X	
20 Watts	600*94*69mm
130 lm/w	2600lm
150 lm/w	3000lm

SL-A65X4-50-X	
50 Watts	1200*94*69mm
130lm/w	6500lm
150lm/w	7500lm

SL-A65X6-80-X	
80 Watts	1800*94*69mm
130lm/w	10400lm
150lm/w	12000lm



SL-A65X2-30-X	
30 Watts	600*94*69mm
130lm/w	3600lm
150lm/w	4500lm

SL-A65X5-50-X	
50 Watts	1500*94*69mm
130lm/w	6500lm
150lm/w	7500lm

SL-A65X8-80-X	
80 Watts	2400*94*69mm
130lm/w	10400lm
150lm/w	12000lm



SL-A65X4-40-X	
40 Watts	1200*94*69mm
130lm/w	5200lm
150lm/w	6000lm

SL-A65X5-60-X	
60 Watts	1500*94*69mm
130lm/w	7800lm
150lm/w	9000lm

SL-A65X10-100-X	
100 Watts	3000*94*69mm
130lm/w	13000lm
150lm/w	15000lm









SL-A65X2-20-X	
20 Watts	600*94*69mm/2Ft
130 lm/w	2600lm
150 lm/w	3000lm

SL-A65X2-30-X	
30 Watts	600*94*69mm/2Ft
130lm/w	3600lm
150lm/w	4500lm

SL-A65X4-40-X	
40 Watts	1200*94*69mm/4Ft
130lm/w	5200lm
150lm/w	6000lm

SL-A65X4-50-X	
50 Watts	1200*94*69mm/4Ft
130lm/w	6500lm
150lm/w	7500lm

SL-A65X4-60-X	
60 Watts	1200*94*69mm/4Ft
130lm/w	7800lm
150lm/w	9000lm

SL-A65X8-80-X	
80 Watts	2400*94*69mm/8Ft
130lm/w	10400lm
150lm/w	12000lm

SL-A65X8-100-X	
100 Watts	2400*94*69mm/8Ft
130lm/w	13000lm
150lm/w	15000lm

c UL us LISTED

DLC

Rancher IP69K


LED Poultry Light

Anti-corrosion & Anti-UV
No water condensation
S316 Components
Suitable for outdoor or indoor
Water jet clean
850 ˚C glow wire test
L80B10(Ta=25˚C)>50,000hrs









SL-P69X2-20-X PC/PMMA	
20 Watts	600*Ø75mm/2Ft
130/135 lm/w	2600/2700 lm
145/150 lm/w	2900/3000 lm

SL-P69X2-30-X PC	
30 Watts	600*Ø75mm/2Ft
130 lm/w	3900 lm
145 lm/w	4350 lm

SL-P69X4-36-X PC/PMMA	
36 Watts	1200* Ø75mm/4Ft
130/135 lm/w	4600/4860 lm
145/150 lm/w	5220/5400 lm

SL-P69X4-50-X PC	
50 Watts	1200*Ø75mm/4Ft
130 lm/w	6500 lm
145 lm/w	7250 lm

SL-P69X5-45-X PC/PMMA	
45 Watts	1500*Ø 75mm/5Ft
130/135 lm/w	5850/6075 lm
145/150 lm/w	6525/6750 lm

SL-P69X5-50-X PC	
50 Watts	1500*Ø 75mm/5Ft
130 lm/w	6500 lm
145 lm/w	7250 lm

SL-P69X5-60-X PC	
60 Watts	1500*Ø 75mm/5Ft
130 lm/w	7800 lm
145 lm/w	8700 lm

Rancher IP66

LED Poultry Light

NEW
RECOMMEND




Anti - yellowing, no dark area, non-cracking
No water condensation
S316 Components
Suitable for Indoor only
Full PC Housing
850 ℃ glow wire test
L80B10(Ta=25 ℃)> 50,000hrs

IP66 IK10

MICROWAVE SENSOR | 0-10 V DIMMABLE | DALI CONTROL | 5 YEARS WARRANTY | Flicker FREE



SL-P66X2-20-X-C	
20 Watts	600*Ø75mm/2Ft
130 lm/w	2600lm
145 lm/w	2900 lm




SL-P66X4-36-X-C	
36 Watts	1200*Ø75mm/4Ft
130 lm/w	4680 lm
145 lm/w	5220 lm



SL-P66X5-45-X-C	
45 Watts	1500*Ø75mm/5Ft
130 lm/w	5850 lm
145 lm/w	6525 lm

CE RoHS









SL-P66X2-20-X-D	
20 Watts	600*Ø75mm
130lm/w	2600lm
140lm/w	2800lm

SL-P66X4-35-X-D	
35 Watts	1200*Ø75mm
130lm/w	4550lm
140lm/w	4900lm

SL-P66X5-45-X-D	
45 Watts	1500*Ø75mm
130lm/w	5850lm
140lm/w	6300lm

• CCT setting(Option)

	1	2	
I	ON		3000K
	ON	ON	4000K
III		ON	5000K

• Power setting(Option)

	4	5	6	
ON	—	—	—	20W
—	—	ON	—	18W
—	ON	—	ON	15W
ON	—	ON	ON	12W

600mm

3	4	5	6	
ON	—	—	—	35W
—	—	ON	—	30W
—	ON	—	ON	25W
ON	—	ON	ON	20W

1200mm

3	4	5	6	
ON	—	—	—	45W
—	—	ON	—	40W
—	ON	—	ON	34W
ON	—	ON	ON	27W

1500mm



Rancher-Mini
LED Tri-proof Light

Smaller Diameter 40mm
No water condensation
Linkable, S316 components
With Aluminum Rebreather
PC material – UV Resistance
L80B10(Ta=25°C)>50,000hrs

IP66 IK10

5 YEARS WARRANTY

Flicker FREE



SL-C40F2-10-X	
10 Watts	600*Ø40mm/2Ft
120lm/w	1200lm
135lm/w	1350lm



SL-C40F4-20-X	
20Watts	1200*Ø40mm/4Ft
120lm/w	2400lm
135lm/w	2700lm



SL-C40F5-30-X	
30 Watts	1500*Ø40mm/5Ft
120lm/w	3600lm
135lm/w	4050lm

c UL us LISTED NSF CE RoHS

Rancher Eco-mini Tri-proof





SL-C40AF2-10-X-B	
10 Watts	600*Ø40mm/2Ft
120lm/w	1200lm
135lm/w	1350lm



SL-C40AF4-20-X-B	
20Watts	1200*Ø40mm/4Ft
120lm/w	2400lm
135lm/w	2700lm



SL-C40AF5-30-X-B	
30 Watts	1500*Ø40mm/5Ft
120lm/w	3600lm
135lm/w	4050lm

CE RoHS 5 YEARS WARRANTY


Gauls
IP68 Tubular Light

Chemical / UV resistance
S304 / S316 Components
Linkable installation
L80B10(Ta=25℃)>50,000hrs









SL-P68X2-20-X	
20 Watts	600*Ø100mm/2Ft
120lm/w	2400lm
135lm/w	2700lm

SL-P68X2-30-X	
30 Watts	600*Ø100mm/2Ft
120lm/w	3600lm
135lm/w	4050lm

SL-P68X4-40-X	
40 Watts	1200*Ø100mm/4Ft
120lm/w	4800lm
135lm/w	5400lm

SL-P68X4-50-X	
50 Watts	1200*Ø1 00mm/4Ft
120lm/w	6000lm
135lm/w	6750lm


SL-P68X5-50-X	
50 Watts	1500*Ø1 00mm/5Ft
120lm/w	6000lm
135lm/w	6750lm

SL-P68X5-60-X	
60 Watts	1500*Ø1 00mm/5Ft
120lm/w	7200lm
135lm/w	8100lm

Alpha

Vapor Tight Light

Full PC housing, S304 clips
Anti-yellowing / Non-Cracking
No dark area, No sulfur seal
L80B10(Ta=25℃)>50,000hrs
Retrofit to 2x36w, 2x58w fluo fitting

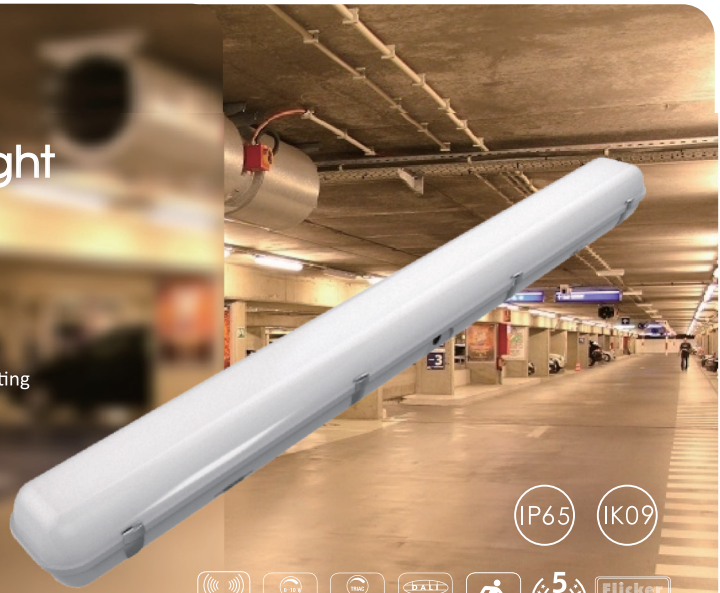







SL-P65X4-40-X	
40 Watts	1260*120*85mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-50-X	
50 Watts	1560*120*85mm/5Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X4-50-X	
50 Watts	1260*120*85mm/4Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X5-60-X	
60 Watts	1560*120*85mm/5Ft
120lm/w	7200lm
140lm/w	7400lm

SAA c UL us LISTED DLC PREMIUM LISTED UKCA ERP CE RoHS

Eco Alpha

Vapor Tight Light

Cost-effective
Full PC housing, S304 clips
Anti-yellowing / Non-Cracking
No dark area, No sulfur seal
Retrofit to 1x36w, 2x36w, 2x58w fluo fitting









SL-P65X4-20-X	
20 Watts	1200*70*75mm/4Ft
120lm/w	2400lm
140lm/w	2800lm

SL-P65X5-40-X	
40 Watts	1500*70*75mm/5Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X4-40-X	
40 Watts	1200*70*75mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-60-X	
60 Watts	1500*70*75mm/5Ft
120lm/w	7200lm
140lm/w	7400lm

SAA ERP CE RoHS


EcoMini II

PC Tri-proof Light

NEW
RECOMMEND

- Linkable/tool-free
- Anti-yellowing / Non-cracking
- Cost-effective, Linkable, Tool free
- Dial code conversion power
- Dial code tone change color temperature





SL-M65X2-20-X-D	
20 Watts	578*73*70mm
130lm/w	2600lm
140lm/w	2800lm




SL-M65X4-35-X-D	
35 Watts	1178*73*70mm
130lm/w	4550lm
140lm/w	4900lm




SL-M65X5-45-X-D	
45 Watts	1478*73*70mm
130lm/w	5850lm
140lm/w	6300lm


• CCT setting(Option)




• Power setting(Option)



578mm



1178mm



1478mm

CE RoHS









SL-P1112-X-18A	
12 Watts	295*295mm
95lm/w	1140lm

SL-P1125-X-18A	
25 Watts	295*295mm
95lm/w	2375lm

SL-P1440-X-18A	
40 Watts	295*1195mm/302*1211mm
100lm/w	4000lm
125lm/w	5000lm

SL-P2240-X-18A	
40 Watts	595*595mm/602*602mm
100lm/w	4000lm
125lm/w	5000lm

SL-P2250-X-18A	
50 Watts	595*595mm
100lm/w	5000lm
125lm/w	6250lm

SL-P2240-X-18A2	
40 Watts	620*620mm
100lm/w	4000lm
125lm/w	5000lm


SL-P2250-X-A-18A2	
50 Watts	620*620mm
100lm/w	5000lm
125lm/w	6250lm

SL-P2460-X-18A	
60 Watts	595*1195mm/602*1211mm
100lm/w	6000lm
125lm/w	7500lm

Intact Panel Light



23.5mm thickness, Internal driver
PMMA LGP, Anti-yellowing
Direct Surface Mounted
UGR<19 / SDCM<3
L80B10(Ta=25℃)>50,000hrs







SL-P1120-X-28A	
20 Watts	295*295mm/1*1ft
100lm/w	1800lm

SL-P2240-X-A-28A2	
40 Watts	620*620mm/2*2ft
100lm/w	4000lm
125lm/w	5000lm

SL-P2240-X-28A	
40 Watts	600*600mm/2*2ft
100lm/w	4000lm
125lm/w	5000lm


SL-P1440-X-28A	
40 Watts	300*1200mm/1*4ft
100lm/w	4000lm
125lm/w	5000lm

CE RoHS 5 YEARS WARRANTY



CCT Internal Driver LED Panel Light


Integrated internal flicker free driver
Support Triac dimming + Switch 3 CCT adjustment
Support Wifi + Bluetooth, Tuya controller
Efficacy : 100lm/w , Up to 125lm/w
High-quality Aluminum + PMMA LGP
Surface mounting without frame



SL-P2240-X-28D	
40 Watts	595*595*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P1440-X-28D	
40 Watts	295*1195*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P2240-X-28D2	
40 Watts	620*620*16mm
100lm/w	4000lm
125lm/w	5000lm

CE RoHS 5 YEARS WARRANTY



Slim LED Panel Light

SUPER Slim design

Economical and Saving freight cost

CRI>80, Up to 130lm/w

IP54 Protaction

High power factor: >0.90

Flicker free driver



SL-P1112-X-26B	
12 Watts	295*295*7mm
100lm/w	1200lm
120lm/w	1440lm



SL-P1225-X-26B	
25 Watts	295*595*7mm
100lm/w	2500lm
120lm/w	3000lm



SL-P2240-X-26B	
40 Watts	595*595*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2240-X-26B2	
40 Watts	620*620*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P1440-X-26B	
40 Watts	295*1195*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2460-X-26B	
60 Watts	595*1195*7mm
100lm/w	4000lm
130lm/w	7800lm



Back-lit Panel Light

No LGP, No yellowing

Slim Design, UGR<19

CRI>80, Up to 125lm/w

High Quality lens, chip and Flicker-Free driver







SL-P2240-X-38A	
40 Watts	595*595*32mm
100lm/w	4000lm

SL-P2240-X-38A2	
40 Watts	620*620*32mm
100lm/w	4000lm

SL-P1440-X-38A	
40 Watts	1195*295*32mm
100lm/w	4000lm

SL-P2440-X-38A	
40 Watts	1195*595*32mm
100lm/w	4000lm

Advertising Panel Light

Lightbox thickenss 16mm, ultra thin
Four side open,quick replacement for posters
Customized sizes available
PMMA LGP high light transmission plat
100lm/w
L80B10 Lifespan of 50,000 Hours (@ Ta = 25°C)









SL-P1115-X-36A	
15 Watts	450*410mm
100lm/w	1500lm

SL-P2330-X-36A	
30 Watts	890*410mm
100lm/w	3000lm

Disc

Round Panel Light

Ultra thin disc design
PMMA LGP , anti-yellowing
Edge-lit, No dark area









SL-D12005-X 4"	
5 Watts	Ø120mm
Cut Size	Ø100mm
70lm/w	350lm

SL-D18010-X 6"	
10 Watts	Ø180mm
Cut Size	Ø165mm
80lm/w	800lm

SL-D24015-X 8"	
15 Watts	Ø240mm
Cut Size	Ø225mm
80lm/w	1100lm

SL-D30020-X 12"	
20 Watts	Ø300mm
Cut Size	Ø285mm
90lm/w	1800lm

CE RoHS 5 YEARS WARRANTY



Disc Round Ceiling Light

Ultra 38mm slim style fashion Patent design
Aluminum+PMMA cover with white & black color for choice
Flicker free internal driver with Non-dim, Triac and WIFI dimming



SL-RL0810-X(CWW)-BX

Size: Ø203mm (8 inch)
Power: 10W, 830~900lm




SL-RL1215-X(CWW)-BX

Size: Ø305mm (12 inch)
Power: 15W, 1300~1550lm



SL-RL1620-X(CWW)-BX

Size: Ø406mm (16 inch)
Power: 20W, 1650~1800lm

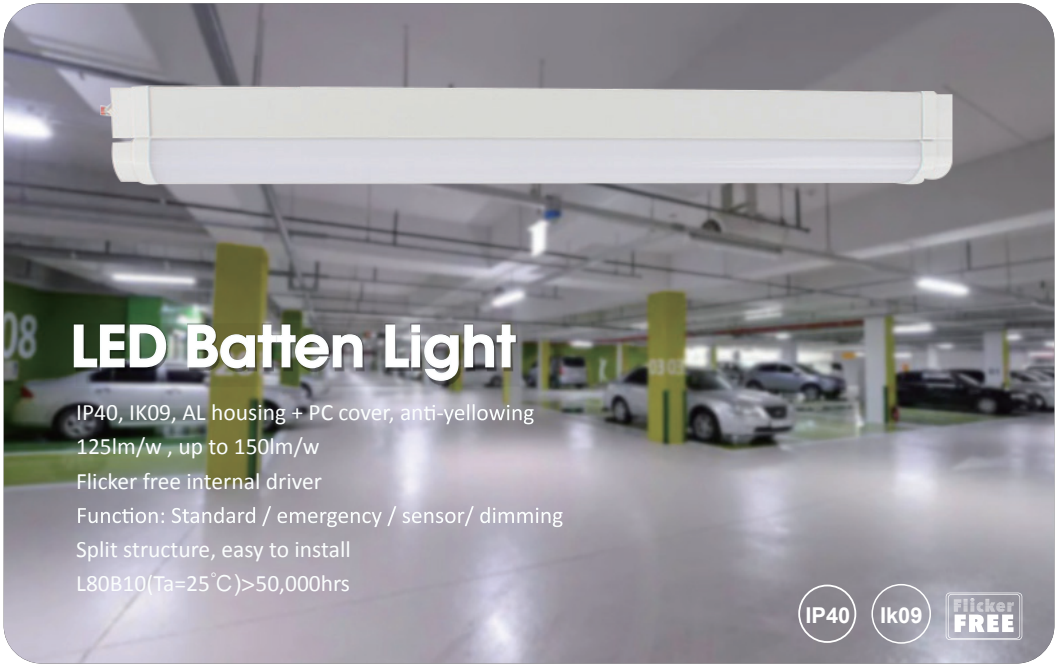

LED Batten Light

IP40, IK09, AL housing + PC cover, anti-yellowing
125lm/w , up to 150lm/w
Flicker free internal driver
Function: Standard / emergency / sensor/ dimming
Split structure, easy to install
L80B10(Ta=25˚C)>50,000hrs

IP40 Ik09 Flicker FREE



SL-BTAX2-10-X	
10 watts	600*67*70mm
125lm/w	1250lm
150lm/w	1650lm



SL-BTAX4-20-X	
20 watts	1200*67*70mm
125lm/w	2500lm
150lm/w	3000lm




SL-BTAX5-30-X	
30 watts	1500*67*70mm
125lm/w	3750lm
150lm/w	4500lm

CE RoHS 5 YEARS WARRANTY





SL-B40X2-40-X	
40 Watts	584*125*13mm
140lm/w	5600lm



SL-B40X4-60-X	
60 Watts	1164*125*13mm
140lm/w	8400lm



SL-B40X5-75-X	
75 Watts	1454*125*13mm
140lm/w	10500lm





SL-B40X2-20-XXB	
20 Watts	585*61*12mm
150lm/w	3000lm



SL-B40X4-40-XXB	
40 Watts	1165*61*12mm
150lm/w	6000lm




SL-B40X5-50-XXB	
50 Watts	1455*61*12mm
150lm/w	7500lm


CE RoHS 5 YEARS WARRANTY

K-Lens

Linkable Linear Light

Instant-Seamless connection
Replaceable driver easily
Asymmetric & Symmetric lens

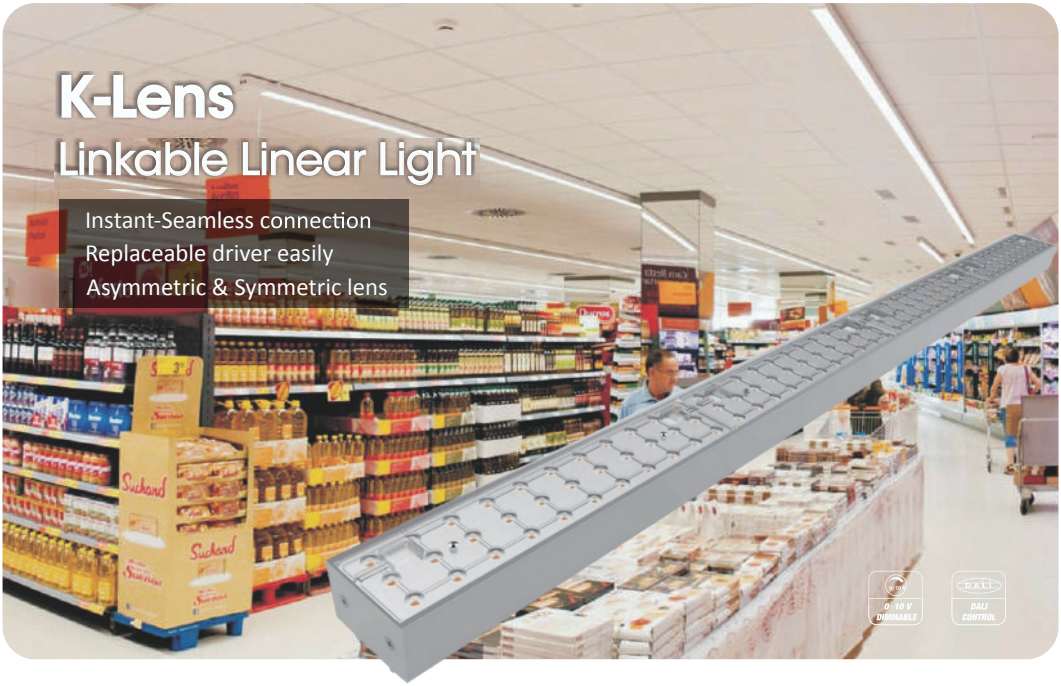



SL-A40X2-20-X	
20 Watts	584*69*47mm/2Ft
140lm/w	2800lm




SL-A40X4-36-X	
36 Watts	1166*69*47mm/4Ft
140lm/w	5000lm



SL-A40X5-45-X	
45 Watts	1457*69*47mm/5Ft
140lm/w	6300lm

CE RoHS 5 YEARS WARRANTY









SL-LIAR(P)2-020

600*80*63mm 2000~2400lm

Light down: 20Watts

Light up and down: 6+14Watts

SL-LIAR(P)-030

900*80*63mm 3000~3600lm

Light down: 30Watts

Light up and down: 9+21Watts

SL-LIAR(P)4-040

1200*80*63mm 4000~4800lm

Light down: 40Watts

Light up and down: 12+28Watts

SL-LIAR(P)5-060

1500*80*63mm 6000~7200lm

Light down: 60Watts

Light up and down: 18+42Watts

SL-LIAR(P)6-080

1800*80*63mm 8000~9600lm

Light down: 80Watts

Light up and down: 24+56Watts


SL-LIAR(P)8-100

2400*80*63mm 10000~12000lm

Light down: 100Watts

Light up and down: 30+70Watts

CE RoHS 5 YEARS WARRANTY

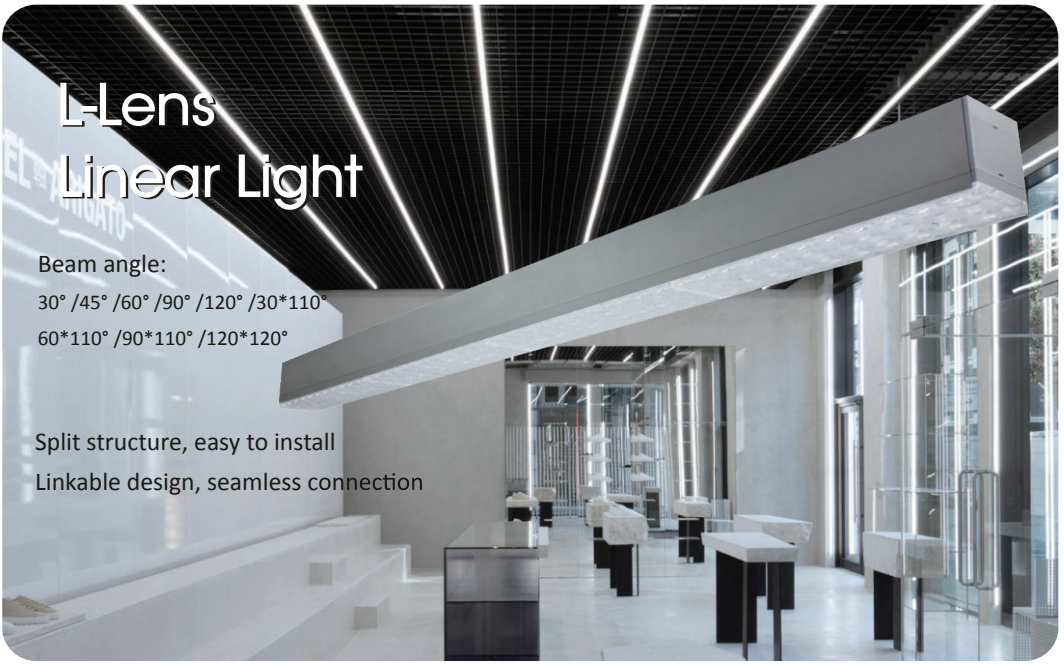

L-Lens
Linear Light

Beam angle:
30° /45° /60° /90° /120° /30*110°
60*110° /90*110° /120*120°

Split structure, easy to install
Linkable design, seamless connection







SL-LIAL2-020	
20 Watts	600*80*63mm/2Ft
130lm/w	2600~3200lm

SL-LIAL3-030	
30 Watts	900*80*63mm/2Ft
130lm/w	3900~4800lm

SL-LIAL4-040	
40 Watts	1200*80*63mm/2Ft
130lm/w	5200~6400lm

SL-LIAL5-060	
60 Watts	1500*80*63mm/2Ft
130lm/w	7800~9600lm

SL-LIAL6-080	
80 Watts	1800*80*63mm/2Ft
130lm/w	10400~12800lm

SL-LIAL8-100	
100 Watts	2400*80*63mm/2Ft
130lm/w	13000~16000lm

CE RoHS 5 YEARS WARRANTY



Mega High Bay


Adjustable angle
Flexible installation way
6-12m height applications
0-10V / PWM dimmable available



SL-MH42X2-100-X	
100 Watts	600*289*103mm/2FT
120lm/w	12000lm
150lm/w	15000lm



SL-MH42X3-120-X	
150 Watts	900*289*103mm/3FT
120lm/w	15600lm
150lm/w	18000lm




SL-MH42X4-150-X	
200 Watts	1200*289*103mm/4FT
120lm/w	18000lm
150lm/w	22500lm




Single High Bay

Wide viewing angle
Patent fashion design
Black/ White housing optional
0-10V / PWM dimmable available



SL-SH42X2-80-X	
80 Watts	600*185*96mm/2FT
120lm/w	9600lm
150lm/w	12000lm



SL-SH42X3-120-X	
120 Watts	900*185*96mm/3FT
120lm/w	14400lm
150lm/w	18000lm



SL-SH42X4-150-X	
150 Watts	1200*185*96mm/4FT
120lm/w	18000lm
150lm/w	22500lm



Security Lighting

Intrusion SMS reminding+ buzzer alarm
IR induction & light control
App control by cellephone
The man-machine Interphone
1080P HD Camera







SL-S1-12-X	
12 Watts	200*100*138mm
100lm/w	1200lm

SL-S2-12-X	
12 Watts	200*165*128mm
100lm/w	1200lm


Expert

T8 LED Tube

Auto-recover while incorrect input
Aluminum housing + PC Cover
±90° rotatable end cap
Up to 150lm/w
Magnetic/ Electronical ballast compatible
L80B10(Ta=25℃)>50,000hrs







SLR-T82X10-117-X	
10 Watts	600mm
120lm/w	1200lm
150lm/w	1500lm

SLR-T84X18-234-X	
18 Watts	1200mm
120lm/w	2160lm
150lm/w	2700lm

SLR-T84X20-234-X	
20 Watts	1200mm
120lm/w	2400lm
150lm/w	3000lm

SLR-T85X22-260-X	
22 Watts	1500mm
120lm/w	2640lm
150lm/w	3300lm

SLR-T85X25-286-X	
25 Watts	1500mm
120lm/w	3000lm
150lm/w	3750lm

SLR-T85X30-312-X	
30 Watts	1500mm
120lm/w	3600lm
150lm/w	4500lm

Expert

T8 LED Tube(CE)


Auto-recover while incorrect input
Aluminum housing + PC Cover
±90° rotatable end cap
Up to 160lm/w
Magnetic/ Electronical ballast compatible
L80B10(Ta=25℃)>50,000hrs




SLR-T82X10-108-X(HF)	
10 Watts	600mm
130lm/w	1300lm
160lm/w	1600lm



SLR-T84X18-240-X(HF)	
18 Watts	1200mm
130lm/w	2300lm
160lm/w	2880lm



SLR-T85X25-288-X(HF)	
25 Watts	1500mm
130lm/w	3250lm
160lm/w	4000lm

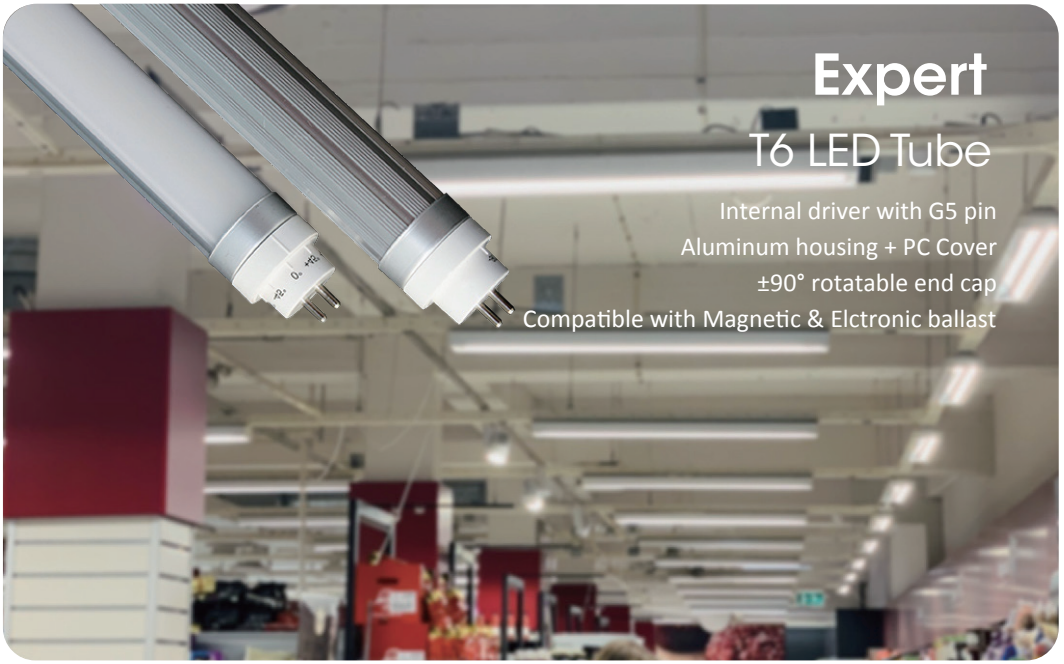

Expert

T6 LED Tube

Internal driver with G5 pin
Aluminum housing + PC Cover
±90° rotatable end cap
Compatible with Magnetic & Elctronic ballast







SL-T62X10-108-X	
10 Watts	549*Ø23.5mm
120lm/w	1200lm
150lm/w	1500lm

SL-T64X20-240-X	
20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm

SL-T65X22-264-X	
22 Watts	1449*Ø23.5mm
120lm/w	2640lm
150lm/w	3300lm

SL-T65X25-288-X	
20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm

CE RoHS 5 YEARS WARRANTY

T5 Integrated LED Tube



Aluminum housing + PC Cover
Integrated structure
Internal drive
Linkable / tool-free







SL-T52X-10-54-XT	
10 Watts	60*23mm
120lm/w	1200lm
140lm/w	1400lm

SL-T53X-15-72-XT	
15 Watts	90*23mm
120lm/w	1800lm
140lm/w	2100lm

SL-T54X-20-120-XT	
20 Watts	120*23mm
120lm/w	2400lm
140lm/w	2800lm

SL-T55X-25-144-XT	
25 Watts	150*23mm
120lm/w	3000lm
140lm/w	3500lm

CE RoHS 5 YEARS WARRANTY

UFO Highbay Light



- CE, RoHS certificate
- NO UV& IR thermal radiation, Hg-Free
- IP65 waterproof, Anti-corrosion
- 160lm/w±10%, Flicker free driver
- High-quality Aluminum housing + Ultra-clear lens
- L80B10(Ta=25℃)>50,000hrs



SL-U65BB-60-X(E)

60 Watts	Φ290*H176mm
160lm/w	9600lm



SL-U65BB-100-X(E)

100 Watts	Φ290*H176mm
160lm/w	16000lm



SL-U65BB-120-X(E)

120 Watts	Φ340*H189mm
160lm/w	19200lm

SL-U65BB-150-X(E)

150 Watts	Φ340*H189mm
160lm/w	24000lm

SL-U65BB-200-X(E)

200 Watts	Φ380*H191mm
160lm/w	32000lm

SL-U65BB-240-X(E)

240 Watts	Φ380*H191mm
160lm/w	38400lm

CE RoHS 5 YEARS WARRANTY



LED Flood Light

IP65,outdoor usage
Tempered glass
Respirator
Up to 140lm/w








SL-F65BD-10-X	SL-F65BD-20-X	SL-F65BD-30-X	SL-F65BD-50-X
10 Watts	20 Watts	30 Watts	50 Watts
120lm/w 1200lm	120lm/w 2400lm	120lm/w 3600lm	130lm/w 6500lm

SL-F65BD-80-X	SL-F65BD-100-X	SL-F65BD-150-X	SL-F65BD-200-X
80 Watts	100 Watts	150 Watts	200 Watts
130lm/w 10400lm	130lm/w 13000lm	130lm/w 19500lm	130lm/w 26000lm






SL-0200-D60

200 Watts


120lm/w 24000lm



SL-0400-D60

400 Watts

120lm/w 48000lm



SL-0600-D20

600 Watts

120lm/w 72000lm

SL-0800-D20

800 Watts

120lm/w 96000lm


SL-1200-D20

1200 Watts

120lm/w 144000lm

CE RoHS 5 YEARS WARRANTY









SL-IFC1000


240*240*80mm (9.45*9.45*3.15 inch)

AC100-240V / 0.1-1A

Output Requirement: PWM/0-10V

Standby Power <1Watt



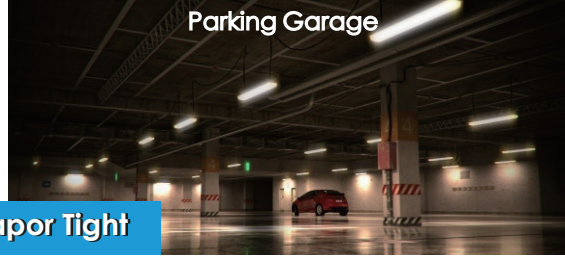

Alpha Vapor Tight





Parkade IP65 Alu Tri-proof







Rancher IP69K Tri-proof








LED Panel Light



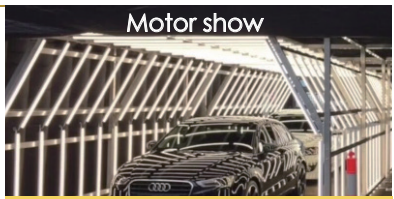

LED Tube Light





Not just made in China
It's made in ShineLong

SHINELONG TECHNOLOGY CORP., LTD.

sales@shinelongled.com

+86-755-8520 3899

shinelongled

www.shinelongled.com

BLDG. A & B, No. 12th Dakeng Rd., Tongle, Baolong street, Longgang, Shenzhen, China, 518118

Scan me get updates