


14⁺ YEARS experience


Independent Innovation LED Lighting Manufacturer

Responsibility, Honesty, Service and Value.
Listed Company
Quality Defender



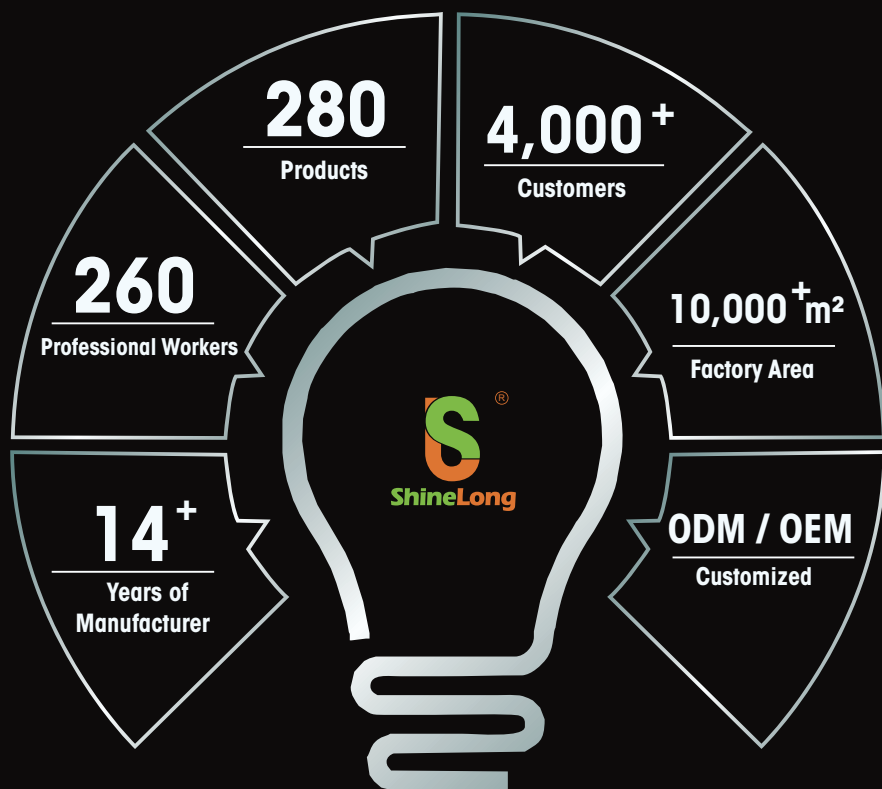

TIMELINE
HISTORICAL BACKGROUND

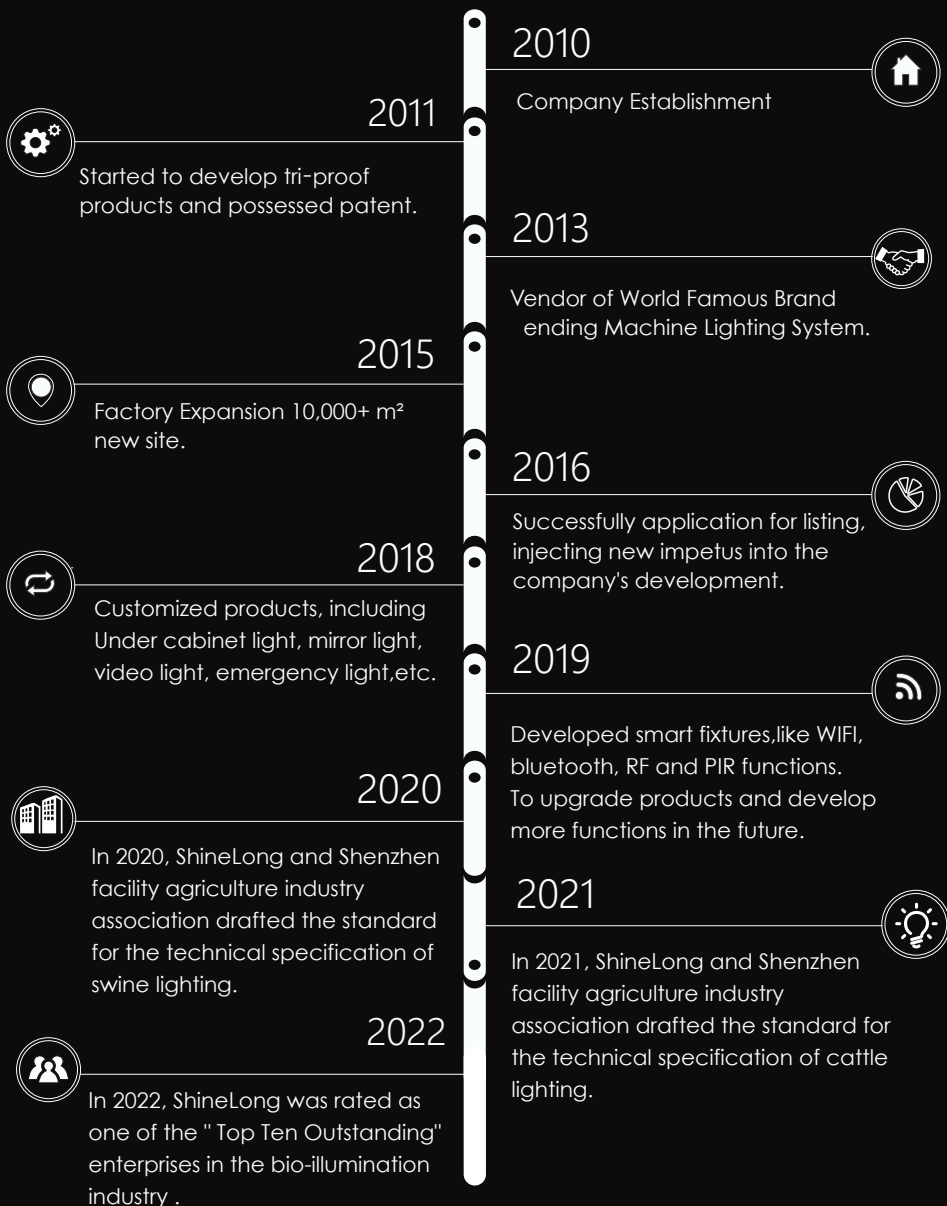

Products Catalog

LED TRI-PROOF LIGHT

Parkade EU&AU	04
Parkade US	05
Rancher IP69K	06
Eco-Rancher IP69K	07
Eco-Rancher Plastic	08
Rancher Mini	09
Rancher Eco Mini	10
Gauls	11
Alpha	12
Eco Alpha	13
Eco Mini II	14
Utilee PC IP65 Tri-proof Light	15

LED PANEL LIGHT

Slice Panel Light	16
Internal Panel Light	17
CCT Internal Driver Panel Light	18
Smart Internal Driver LED Panel Light	19
Slim LED Panel Light	20
Back-lit Panel Light	21
Advertising Panel Light	22
Disc Round Panel Light	23
Disc Round Ceiling Light	24

Commercial Lighting

LED Batten Light	25
LED Slimbay Light	26
Single Slimbay Light	27

K-lens Linear Light	28
LED Linear Light	29
LED Linear Light L Lens	30
Mega High Bay	31
Single High Bay	32
Security Light	33
Reflex LED Indirect Light	34
Seam LED Linear Light	35
Smart Multicolour LED Tube Light	36
Protac Explosion-proof Light	37

LED TUBE

Expert T8 LED Tube	38
Expert T8 LED Tube(CE)	39
Expert T6 LED Tube	40
T5 Batten Light	41

Outdoor Lighting

UFO High Bay	42
LED Flood Light	43
Arealux Stadium Light	44

Control System

Smart Control System	45
----------------------------	----

Parkade^{EU&AU} Garage Lights

Linkable / tool-free
Up to 150lm/w
94V0 materials
L80B10=89000hrs
Aluminum casing + PC cover

IP66

IK10



SL-A65X2-20-X

20 Watts	600*94*69mm
130 lm/w	2600lm
150 lm/w	3000lm



SL-A65X2-30-X

30 Watts	600*94*69mm
130lm/w	3600lm
150lm/w	4500lm



SL-A65X4-40-X

40 Watts	1200*94*69mm
130lm/w	5200lm
150lm/w	6000lm

SL-A65X4-50-X

50 Watts	1200*94*69mm
130lm/w	6500lm
150lm/w	7500lm

SL-A65X5-50-X

50 Watts	1500*94*69mm
130lm/w	6500lm
150lm/w	7500lm

SL-A65X5-60-X

60 Watts	1500*94*69mm
130lm/w	7800lm
150lm/w	9000lm

SL-A65X6-80-X

80 Watts	1800*94*69mm
130lm/w	10400lm
150lm/w	12000lm

SL-A65X8-80-X

80 Watts	2400*94*69mm
130lm/w	10400lm
150lm/w	12000lm

SL-A65X10-100-X

100 Watts	3000*94*69mm
130lm/w	13000lm
150lm/w	15000lm



Parkade^{US}




Vapor Tight Light

DLC 5.1 premium
94V0 materials
L80B10=89000hrs
3/4"/1/2" connector options
Single/ Linkbale / Rear connection



IP66

IK10



SL-A65X2-20-X

20 Watts 600*94*69mm/2Ft
130 lm/w 2600lm
150 lm/w 3000lm

SL-A65X2-30-X

30 Watts 600*94*69mm/2Ft
130lm/w 3600lm
150lm/w 4500lm

SL-A65X4-40-X

40 Watts 1200*94*69mm/4Ft
130lm/w 5200lm
150lm/w 6000lm

SL-A65X4-50-X

50 Watts 1200*94*69mm/4Ft
130lm/w 6500lm
150lm/w 7500lm

SL-A65X4-60-X

60 Watts 1200*94*69mm/4Ft
130lm/w 7800lm
150lm/w 9000lm

SL-A65X8-80-X

80 Watts 2400*94*69mm/8Ft
130lm/w 10400lm
150lm/w 12000lm

SL-A65X8-100-X

100 Watts 2400*94*69mm/8Ft
130lm/w 13000lm
150lm/w 15000lm



Rancher IP69K

LED Poultry Light

Anti-corrosion & Anti-UV
No water condensation
S316 Components
Suitable for outdoor or indoor
Waterjet clean
850 °C glow wire test
L80B10(Ta=25°C)>50,000hrs



IP69K

IK10



SL-P69X2-20-X PC/PMMA

20 Watts 600*Ø75mm/2Ft
130/135 lm/w 2600/2700 lm
145/150 lm/w 2900/3000 lm

SL-P69X2-30-X PC

30 Watts 600*Ø75mm/2Ft
130 lm/w 3900 lm
145 lm/w 4350 lm

SL-P69X4-36-X PC/PMMA

36 Watts 1200*Ø75mm/4Ft
130/135 lm/w 4600/4860 lm
145/150 lm/w 5220/5400 lm

SL-P69X4-50-X PC

50 Watts 1200*Ø75mm/4Ft
130 lm/w 6500 lm
145 lm/w 7250 lm

SL-P69X5-45-X PC/PMMA

45 Watts 1500*Ø75mm/5Ft
130/135 lm/w 5850/6075 lm
145/150 lm/w 6525/6750 lm

SL-P69X5-50-X PC

50 Watts 1500*Ø75mm/5Ft
130 lm/w 6500 lm
145 lm/w 7250 lm

SL-P69X5-60-X PC

60 Watts 1500*Ø75mm/5Ft
130 lm/w 7800 lm
145 lm/w 8700 lm



Eco-Rancher IP69K

LED Poultry Light

Anti - yellowing, no dark area, non-cracking
 No water condensation
 S316 Components
 Suitable for Indoor only
 Full PC Housing
 850 °C glow wire test
 L80B10(Ta=25 °C)>50,000hrs




IP69K IK10



SL-P66X2-20-X-C

20 Watts 600*Ø75mm/2Ft
 130 lm/w 2600lm
 145 lm/w 2900 lm



SL-P66X4-36-X-C

36 Watts 1200*Ø75mm/4Ft
 130 lm/w 4680 lm
 145 lm/w 5220 lm



SL-P66X5-45-X-C

45 Watts 1500*Ø75mm/5Ft
 130 lm/w 5850 lm
 145 lm/w 6525 lm




Eco-Rancher Plastic IP69K Tri-proof Light

Dial code conversion power
Dial code tone change color temperature
Anti-yellowing / Non-Cracking
S316 Components
Linkable, Cost-effective, Tool free

IP69K

IK09



SL-P66X2-20-X-D

20 Watts 600*Ø75mm
130lm/w 2600lm
140lm/w 2800lm



SL-P66X4-35-X-D

35 Watts 1200*Ø75mm
130lm/w 4550lm
140lm/w 4900lm



SL-P66X5-45-X-D

45 Watts 1500*Ø75mm
130lm/w 5850lm
140lm/w 6300lm

• CCT setting(Optional)

	1	2	
I	ON		3000K
		ON	4000K
III		ON	5000K

• Power setting(Optional)

4	5	6	
ON	—	—	20W
—	—	ON	18W
—	ON	—	15W
ON	—	ON	12W

600mm

3	4	5	6	
ON	—	—	—	35W
—	—	ON	—	30W
—	ON	—	ON	25W
ON	—	ON	ON	20W

1200mm

3	4	5	6	
ON	—	—	—	45W
—	—	ON	—	40W
—	ON	—	ON	34W
ON	—	ON	ON	27W

1500mm



Rancher-Mini

LED Tri-proof Light

Smaller Diameter 40mm
No water condensation
Linkable, S316 components
With Aluminum Rebreather
PC material-UV Resistance
L80B10(Ta=25°C)>50,000hrs

IP66

IK10

5
YEAR
WARRANTY

Flicker
FREE



SL-C40F2-10-X

10 Watts	600*Ø40mm/2Ft
120lm/w	1200lm
135lm/w	1350lm



SL-C40F4-20-X

20Watts	1200*Ø40mm/4Ft
120lm/w	2400lm
135lm/w	2700lm



SL-C40F5-30-X

30 Watts	1500*Ø40mm/5Ft
120lm/w	3600lm
135lm/w	4050lm



Rancher Eco-mini Tri-proof Light

IP66 & IK09 Grading
High cost-effective
Innovate installation method
L80B10(Ta=25°C) > 50,000hrs

IP66

IK09

5
YEAR WARRANTY

Flicker
FREE



SL-C40AF2-10-X-B

10 Watts	600*Ø40mm/2Ft
120lm/w	1200lm
135lm/w	1350lm



SL-C40AF4-20-X-B

20Watts	1200*Ø40mm/4Ft
120lm/w	2400lm
135lm/w	2700lm



SL-C40AF5-30-X-B

30 Watts	1500*Ø40mm/5Ft
120lm/w	3600lm
135lm/w	4050lm



Gauls

IP68 Tubular Light

Chemical / UV resistance
S304 / S316 Components
Linkable installation
L80B10(Ta=25°C)>50,000hrs



IP68

IK10




SL-P68X2-20-X

20 Watts	600*Ø100mm/2Ft
120lm/w	2400lm
135lm/w	2700lm



SL-P68X2-30-X

30 Watts	600*Ø100mm/2Ft
120lm/w	3600lm
135lm/w	4050lm



SL-P68X4-40-X

40 Watts	1200*Ø100mm/4Ft
120lm/w	4800lm
135lm/w	5400lm

SL-P68X4-50-X

50 Watts	1200*Ø100mm/4Ft
120lm/w	6000lm
135lm/w	6750lm

SL-P68X5-50-X

50 Watts	1500*Ø100mm/5Ft
120lm/w	6000lm
135lm/w	6750lm

SL-P68X5-60-X

60 Watts	1500*Ø100mm/5Ft
120lm/w	7200lm
135lm/w	8100lm



Alpha Vapor Tight Light

Full PC housing, S304 clips
Anti-yellowing / Non-Cracking
No dark area, No sulfur seal
L80B10($T_a=25^{\circ}\text{C}$)>50,000hrs
Retrofit to 2x36w, 2x58w fluo fitting



IP65 IK09



SL-P65X4-40-X

40 Watts	1270*125*95mm/4Ft
120lm/w	4800lm
140lm/w	5600lm



SL-P65X4-50-X

50 Watts	1270*125*95mm/4Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X5-50-X

50 Watts	1570*125*95mm/5Ft
120lm/w	6000lm
140lm/w	7000lm

SL-P65X5-60-X

60 Watts	1570*125*95mm/5Ft
120lm/w	7200lm
140lm/w	7400lm



Eco Alpha

Vapor Tight Light

Cost-effective

Full PC housing, S304 clips

Anti-yellowing / Non-Cracking

No dark area, No sulfur seal

Retrofit to 1x36w, 2x36w 2x58w fluo fitting



IP65

IK09



SL-P65X4-20-X

20 Watts	1200*100*75mm/4Ft
120lm/w	2400lm
140lm/w	2800lm



SL-P65X4-40-X

40 Watts	1200*100*75mm/4Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-40-X

40 Watts	1500*100*75mm/5Ft
120lm/w	4800lm
140lm/w	5600lm

SL-P65X5-60-X


60 Watts	1500*100*75mm/5Ft
120lm/w	7200lm
140lm/w	7400lm



EcoMini II


PC Tri-proof Light

Linkable/tool-free
Anti-yellowing / Non-cracking
High cost-effectiveness, Linkable, Tool free
Dial code conversion power
Dial code tone change color temperature

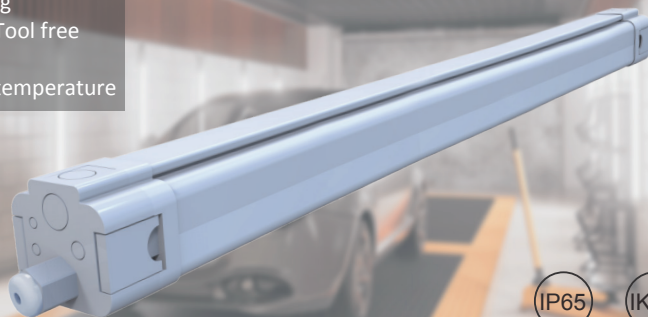


IP65

IK09




SL-M65X2-20-X-D

20 Watts 578*73*70mm
130lm/w 2600lm
140lm/w 2800lm



SL-M65X4-35-X-D

35 Watts 1178*73*70mm
130lm/w 4550lm
140lm/w 4900lm



SL-M65X5-45-X-D

45 Watts 1478*73*70mm
130lm/w 5850lm
140lm/w 6300lm

• CCT setting(Optional)

	1	2	
I	ON		3000K
	ON	ON	4000K
III		ON	5000K

• Power setting(Optional)

	4	5	6	
ON	—	—	—	20W
—	—	ON	—	18W
—	ON	—	ON	15W
ON	—	ON	ON	12W

578mm

	3	4	5	6	
ON	—	—	—	—	35W
—	—	ON	—	—	30W
—	ON	—	ON	—	25W
ON	—	ON	ON	ON	20W

1178mm

	3	4	5	6	
ON	—	—	—	—	45W
—	—	ON	—	—	40W
—	ON	—	ON	—	34W
ON	—	ON	ON	ON	27W

1478mm



Utilee

PC IP65 Tri-proof Light

Linkable, Tool free
 Super cost-effective
 High Efficacy: 120-150lm/w
 High efficiency internal driver
 Detachable end cap with quick connector



IP65

IK09

Flicker
FREE



SL-P65X2-20-X-D

20 Watts	600*75*43mm
120lm/w	2400lm
150lm/w	3000lm



SL-P65X4-30-X-D

30 Watts	1200*75*43mm
120lm/w	3600lm
150lm/w	4500lm



SL-P65X5-40-X-D

40 Watts	1500*75*43mm
120lm/w	4800lm
150lm/w	6000lm



Slice Panel Light

Edge-lit, No dark area
PMMA LGP, anti-yellowing
UGR<19 /SDCM<3
850°C Glow wire Test
L80B10(Ta=25°C)>50,000hrs



SL-P1112-X-18A

12 Watts 295*295mm
95lm/w 1140lm

SL-P1125-X-18A

25 Watts 295*295mm
95lm/w 2375lm

SL-P1440-X-18A

40 Watts
295*1195mm/302*1211mm
100lm/w 4000lm
125lm/w 5000lm

SL-P2240-X-18A

40 Watts
595*595mm/602*602mm
100lm/w 4000lm
125lm/w 5000lm

SL-P2250-X-18A

50 Watts 595*595mm
100lm/w 5000lm
125lm/w 6250lm

SL-P2240-X-18A2

40 Watts 620*620mm
100lm/w 4000lm
125lm/w 5000lm

SL-P2250-X-A-18A2

50 Watts 620*620mm
100lm/w 5000lm
125lm/w 6250lm


SL-P2460-X-18A

60 Watts
595*1195mm/602*1211mm
100lm/w 6000lm
125lm/w 7500lm



Internal Panel Light

23.5mm thickness, Internal driver
PMMA LGP, Anti-yellowing
Direct Surface Mounted
UGR<19 /SDCM<3
L80B10(Ta=25°C)>50,000hrs



SL-P1120-X-28A

20 Watts	295*295mm/1'1ft
100lm/w	1800lm



SL-P2240-X-28A

40 Watts	600*600mm/2'2ft
100lm/w	4000lm
125lm/w	5000lm

SL-P2240-X-A-28A2

40 Watts	620*620mm/2'2ft
100lm/w	4000lm
125lm/w	5000lm


SL-P1440-X-28A

40 Watts	300*1200mm/1'4ft
100lm/w	4000lm
125lm/w	5000lm



CCT Internal Driver LED Panel Light

Integrated internal flicker free driver
Support Triac dimming + Switch 3 CCT adjustment
Support Wifi+ Bluetooth, Tuya controller
Efficacy: 100lm/w , Up to 125lm/w
High-quality Aluminum +PMMA LGP
Surface mounting without frame




SL-P2240-X-28D

40 Watts	595*595*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P1440-X-28D

40 Watts	295*1195*16mm
100lm/w	4000lm
125lm/w	5000lm



SL-P2240-X-28D2

40 Watts	620*620*16mm
100lm/w	4000lm
125lm/w	5000lm



Smart Internal Driver LED Panel Light

Instant on/off, edge-lit, no dark area, anti-yellowing

Support On/Off switch 5 CCT adjustment + Ambient light

Support CCT adjustment + RGB Ambient light (Wifi + Bluetooth, APP controller)



IP40

IK06


Flicker
FREE



SL-P2240-X-28E

35+5 Watts
100lm/w

612*612*32mm
4000lm



SL-P1440-X-28E

35+5 Watts
100lm/w

312*1222*32mm
4000lm



SL-P2450-X-28E

45+5 Watts
100lm/w

612*1222*32mm
5000lm



Slim LED Panel Light

SUPER Slim design

Economical and Saving freight cost

CRI>80, Up to 130lm/w

IP54 Protection

High power factor: >0.90

Flicker free driver

IP54



SL-P1112-X-26B

12 Watts	295*295*7mm
100lm/w	1200lm
120lm/w	1440lm



SL-P1225-X-26B

25 Watts	295*595*7mm
100lm/w	2500lm
120lm/w	3000lm



SL-P2240-X-26B

40 Watts	595*595*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2240-X-26B2

40 Watts	620*620*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P1440-X-26B

40 Watts	295*1195*7mm
100lm/w	4000lm
130lm/w	5200lm

SL-P2460-X-26B

60 Watts	595*1195*7mm
100lm/w	4000lm
130lm/w	7800lm



Backlit LED Panel Light




One-time stretching process

Slim Design, UGR<19

CRI>80, Up to 140lm/w

Material: High-quality Aluminum



SL-P1225-X-38B

30 Watts	295*595*33mm
120lm/w	3600lm
140lm/w	4200lm



SL-P2240-X-38B

40 Watts	595*595*33mm
120lm/w	4800lm
140lm/w	5600lm



SL-P1440-X-38B

40 Watts	295*595*33mm
120lm/w	4800lm
140lm/w	5600lm

SL-P2450-X-38B

50 Watts	1195*595*33mm
120lm/w	6000lm
140lm/w	7000lm



Advertising Panel Light

Lightbox thickness 16mm, ultra thin
Four-side open, quick replacement for posters
Customized sizes available
PMMA LGP high light transmission plat
100lm/w
L80B10 Lifespan of 50,000 Hours (@Ta= 25°C)



SL-P1115-X-36A

15 Watts 450*410mm
100lm/w 1500lm



SL-P2330-X-36A

30 Watts 890*410mm
100lm/w 3000lm



Disc

Round Panel Light

Ultra thin disc design
PMMA LGP , anti-yellowing
Edge-lit, No dark area



SL-D12005-X 4"

5 Watts	Ø120mm
Cut Size	Ø100mm
70lm/w	350lm



SL-D18010-X 6"

10 Watts	Ø180mm
Cut Size	Ø165mm
80lm/w	800lm

SL-D24015-X 8"

15 Watts	Ø240mm
Cut Size	Ø225mm
80lm/w	1100lm

SL-D30020-X 12"

20 Watts	Ø300mm
Cut Size	Ø285mm
90lm/w	1800lm





Dis Round Ceiling Light

Ultra 38mm slim style fashion Patent design

Aluminum+PMMA cover with white & black color for choice

Flicker free internal driver with Non-dim, Triac and WIFI dimming



SL-RL0810-X(CWW)-BX

Size: Ø203mm (8 inch)

Power: 10W, 830~900lm



SL-RL1215-X(CWW)-BX

Size: Ø305mm (12 inch)

Power: 15W, 1300~1550lm



SL-RL1620-X(CWW)-BX

Size: Ø406mm (16 inch)

Power: 20W, 1650~1800lm



LED Batten Light

IP40, IK09, AL housing + PC cover, anti-yellowing

125lm/w, up to 150lm/w

Flicker free internal driver

Function: Standard / emergency / sensor / dimming

Split structure, easy to install

L80B10(Ta=25°C)>50,000hrs



SL-BTAX2-10-X

10 watts	600*67*70mm
125lm/w	1250lm
150lm/w	1650lm



SL-BTAX4-20-X

20 watts	1200*67*70mm
125lm/w	2500lm
150lm/w	3000lm



SL-BTAX5-30-X

30 watts	1500*67*70mm
125lm/w	3750lm
150lm/w	4500lm





LED Slimbay Light

UGR<19

2*45° Lens

140lm/w

Ultra-Slim 8.5mm

Track rail / Ceiling /Suspended optional




SL-B40X2-40-X

40 Watts

584*125*13mm

140lm/w

5600lm



SL-B40X4-60-X

60 Watts

1164*125*13mm

140lm/w

8400lm



SL-B40X5-75-X


75 Watts

1454*125*13mm

140lm/w

10500lm



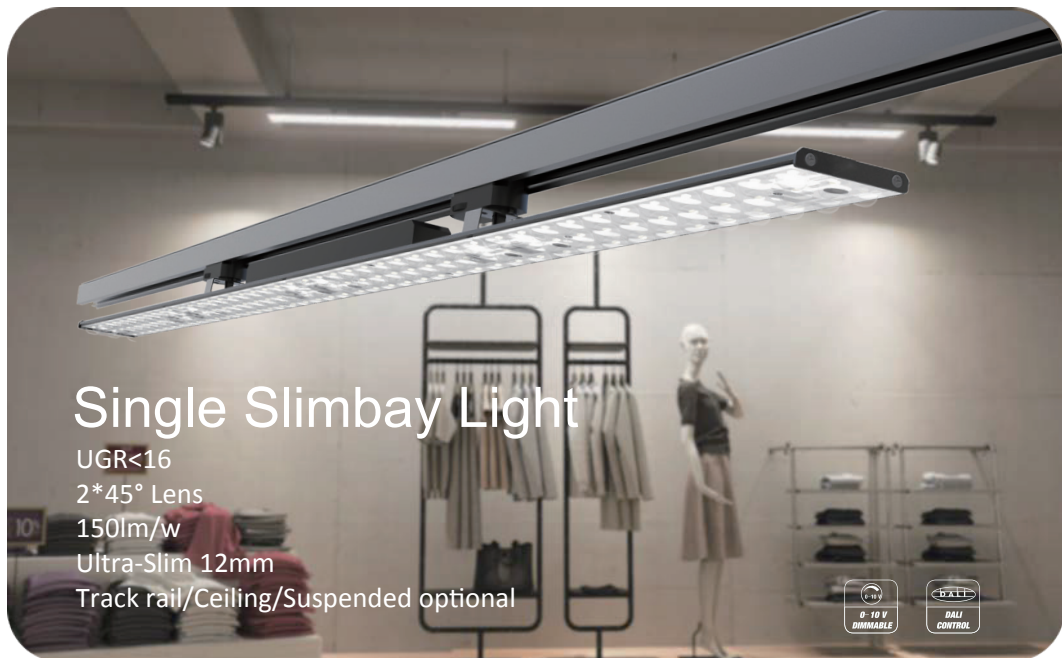

Single Slimbay Light

UGR<16

2*45° Lens

150lm/w

Ultra-Slim 12mm

Track rail/Ceiling/Suspended optional



SL-B40X2-20-XXB

20 Watts

585*61*12mm

150lm/w

3000lm



SL-B40X4-40-XXB

40 Watts

1165*61*12mm

150lm/w

6000lm



SL-B40X5-50-XXB

50 Watts

1455*61*12mm

150lm/w


7500lm



K-Lens

Linkable Linear Light

Instant-Seamless connection
Replaceable driver easily
Asymmetric & Symmetric lens



SL-A40X2-20-X

20 Watts 584*69*47mm/2Ft
140lm/w 2800lm



SL-A40X4-36-X

36 Watts 1166*69*47mm/4Ft
140lm/w 5000lm



SL-A40X5-45-X

45 Watts 1457*69*47mm/5Ft
140lm/w 6300lm



LED Linear Light


Up & Down emitting
Split structure, easy to install
Large beam angle: R=180°/P=120°
Linkable design, seamless connection

Angle: R=180°



Angle: P=120°

Up & Down emitting



SL-LIAR(P)2-020

600*80*63mm 2000~2400lm

Light down: 20Watts

Light up and down: 6+14Watts

SL-LIAR(P)3-030

900*80*63mm 3000~3600lm

Light down: 30Watts

Light up and down: 9+21Watts

SL-LIAR(P)4-040

1200*80*63mm 4000~4800lm

Light down: 40Watts

Light up and down: 12+28Watts

SL-LIAR(P)5-060

1500*80*63mm 6000~7200lm

Light down: 60Watts

Light up and down: 18+42Watts

SL-LIAR(P)6-080

1800*80*63mm 8000~9600lm

Light down: 80Watts

Light up and down: 24+56Watts

SL-LIAR(P)8-100

2400*80*63mm 10000~12000lm

Light down: 100Watts

Light up and down: 30+70Watts



L-Lens Linear Light

Beam angle:

30° / 45° / 60° / 90° / 120° / 30°*110°

60°*110° / 90°*110° / 120°*120°

Split structure, easy to install

Linkable design, seamless connection



SL-LIAL2-020

20 Watts 600*80*63mm/2Ft
130lm/w 2600~3200lm



Connector

SL-LIAL3-030

30 Watts 900*80*63mm/2Ft
130lm/w 3900~4800lm



SL-LIAL4-040

40 Watts 1200*80*63mm/2Ft
130lm/w 5200~6400lm

SL-LIAL5-060

60 Watts 1500*80*63mm/2Ft
130lm/w 7800~9600lm


SL-LIAL6-080

80 Watts 1800*80*63mm/2Ft
130lm/w 10400~12800lm

SL-LIAL8-100

100 Watts 2400*80*63mm/2Ft
130lm/w 13000~16000lm



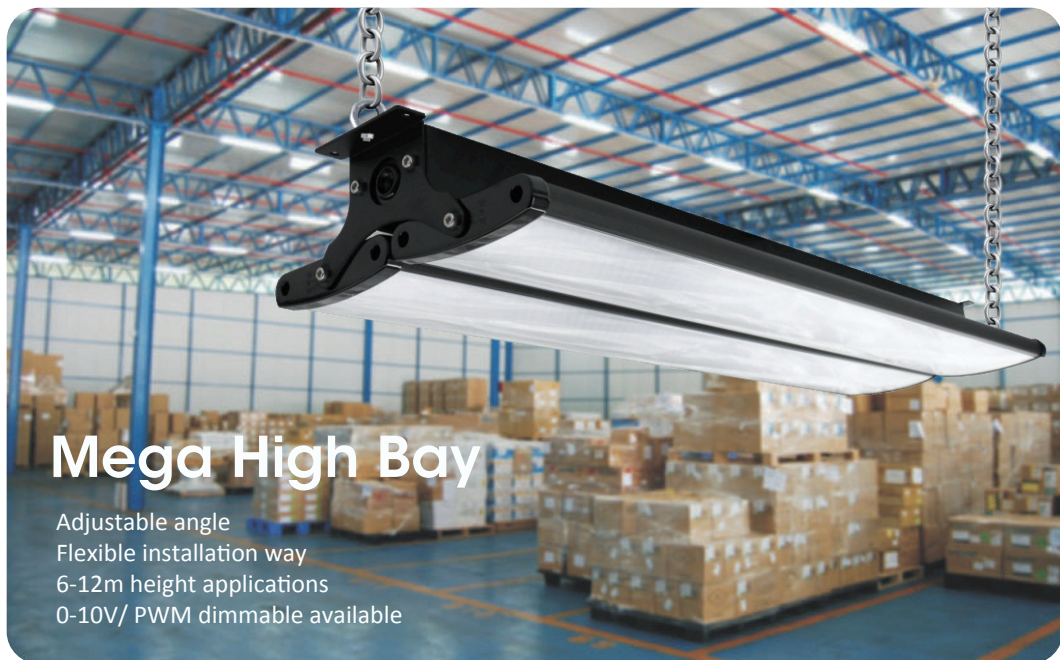

Mega High Bay

Adjustable angle
Flexible installation way
6-12m height applications
0-10V/ PWM dimmable available




SL-MH42X2-100-X

100 Watts	600*289*103mm/2FT
120lm/w	12000lm
150lm/w	15000lm



SL-MH42X3-120-X


150 Watts	900*289*103mm/3FT
120lm/w	15600lm
150lm/w	18000lm



SL-MH42X4-150-X


200 Watts	1200*289*103mm/4FT
120lm/w	18000lm
150lm/w	22500lm



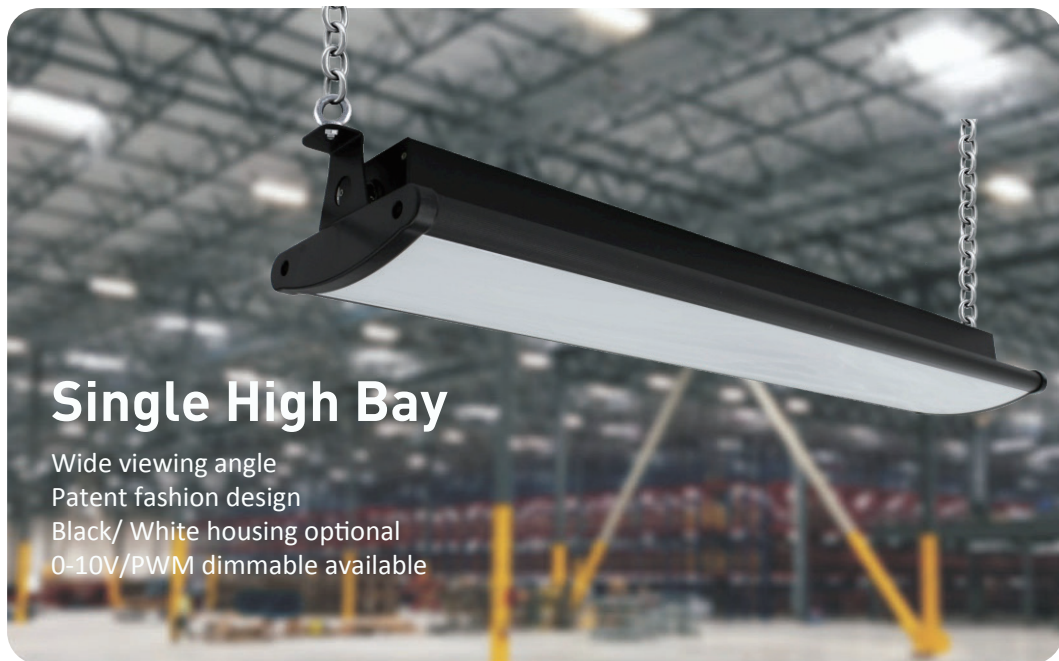


Single High Bay

Wide viewing angle
Patent fashion design
Black/ White housing optional
0-10V/PWM dimmable available



SL-SH42X2-80-X

80 Watts	600*185*96mm/2FT
120lm/w	9600lm
150lm/w	12000lm



SL-SH42X3-120-X

120 Watts	900*185*96mm/3FT
120lm/w	14400lm
150lm/w	18000lm



SL-SH42X4-150-X

150 Watts	1200*185*96mm/4FT
120lm/w	18000lm
150lm/w	22500lm





Security Lighting

Intrusion SMS reminding+ buzzer alarm
 IR induction & light control
 App control by cellphone
 The man-machine Interphone
 1080P HD Camera



SL-S1-12-X

12 Watts 200*100*138mm
 100lm/w 1200lm



SL-S2-12-X

12 Watts 200*165*128mm
 100lm/w 1200lm





Reflex LED Indirect Light

Indirect Lighting, No Spot or Glare
UGR<19, No flicker driver
CCT & power tunable
L80B10(Ta=25 C)>50,000hrs



SL-LD70X2-20-X

20 Watts 562*Ø70mm
100lm/w 2000lm



SL-LD70X4-36-X

36 Watts 1118*Ø70mm
100lm/w 3600lm



SL-LD70X5-45-X

45 Watts 1397*Ø70mm
100lm/w 4500lm

■ 562mm

DIP Switch			
Power(±10%)	10W	15W	20W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1118mm

DIP Switch			
Power(±10%)	25W	30W	36W
DIP Switch			
CCT	3000K	4000K	5000K

■ 1397mm

DIP Switch			
Power(±10%)	35W	40W	45W
DIP Switch			
CCT	3000K	4000K	5000K





Seam LED Linear Light

DIP switch power

DIP switch CCT: (3000K/4000K/5000K or 4000K/5000K/6000K)


Instant seamless connection

Light Direction: Light up and down / Light down

High Efficacy: 130lm/w $\pm 10\%$, up to 140lm/w $\pm 10\%$

Suspended / Surface Mount / Wall mount installation

Material: Black painted 6063# Aluminum housing (White painted optional)



Instant seamless connection

SL-LS50X2-20-X

20 Watts
120lm/w

600*50*70mm
2600lm




Up & Down emitting

SL-LS50X4-40-X

40 Watts
180lm/w

1200*50*70mm
5200lm



Wall Mounted Installation

Ceiling Mounted Installation

SL-LS50X8-80-X

80 Watts
180lm/w

2400*105mm
10400lm



Smart Multicolour LED Tube Light

High Efficacy: 120lm/w $\pm 10\%$

Linkable Option Available

Metal Base: Black or Silver option

Adjustable Color Temperature and Brightness

CCT Tunable (2200K-6500K) or CCT Tunable + RGB Option


With The TUYA Smart Home APP, support biological rhythm, musical rhythm



IP54

IK09

Flicker
FREE



SL-C40BF2-15-D

15 Watts
120lm/w

600*105mm
1800lm



SL-C40BF4-30-D

30 Watts
120lm/w

1500*105mm
3600lm



SL-C40BF3-22-D

22 Watts
180lm/w

900*105mm
2640lm

SL-C40BF5-40-D

40 Watts
120lm/w

1500*105mm
4800lm



Protac Explosion-proof Light

ATEX Quick Connector

High-strength PC Dual Color Housing

Endcap: PA66 + Fibreglass

ENEC Certified Flicker Free Driver, THD<15%



IP69K

IP66

IK10



SL-P69X2-20-YD

20 Watts
150lm/w

600*Ø76mm/2Ft
3000lm



SL-P69X3-30-YD

30 Watts
150lm/w

1200*Ø76mm/3Ft
4500lm



SL-P69X4-36-YD

36 Watts
150lm/w

1500*Ø76mm/4Ft
5400lm



Expert

T8 LED Tube

Auto-recover while incorrect input


Aluminum housing + PC Cover

±90° rotatable end cap

Up to 150lm/w

Magnetic/ Electronical ballast compatible

L80B10(Ta=25°C)>50,000hrs



SLR-T82X10-117-X

10 Watts	600mm
120lm/w	1200lm
150lm/w	1500lm



SLR-T84X18-234-X

18 Watts	1200mm
120lm/w	2160lm
150lm/w	2700lm



SLR-T84X20-234-X

20 Watts	1200mm
120lm/w	2400lm
150lm/w	3000lm

SLR-T85X22-260-X	
22 Watts	1500mm
120lm/w	2640lm
150lm/w	3300lm

SLR-T85X25-286-X	
25 Watts	1500mm
120lm/w	3000lm
150lm/w	3750lm

SLR-T85X30-312-X	
30 Watts	1500mm
120lm/w	3600lm
150lm/w	4500lm



Expert

T8 LED Tube(CE)

Auto-recover while incorrect input

Aluminum housing + PC Cover

±90° rotatable end cap

Up to 180lm/w

Magnetic/ Electronical ballast compatible

L80B10(Ta=25°C)>50,000hrs



SLR-T82X08-168-X

8 Watts

600mm

180lm/w

1440lm



SLR-T84X18-280-X

18 Watts

1200mm

180lm/w

3240lm



SLR-T85X25-336-X


25 Watts

1500mm

180lm/w

4500lm



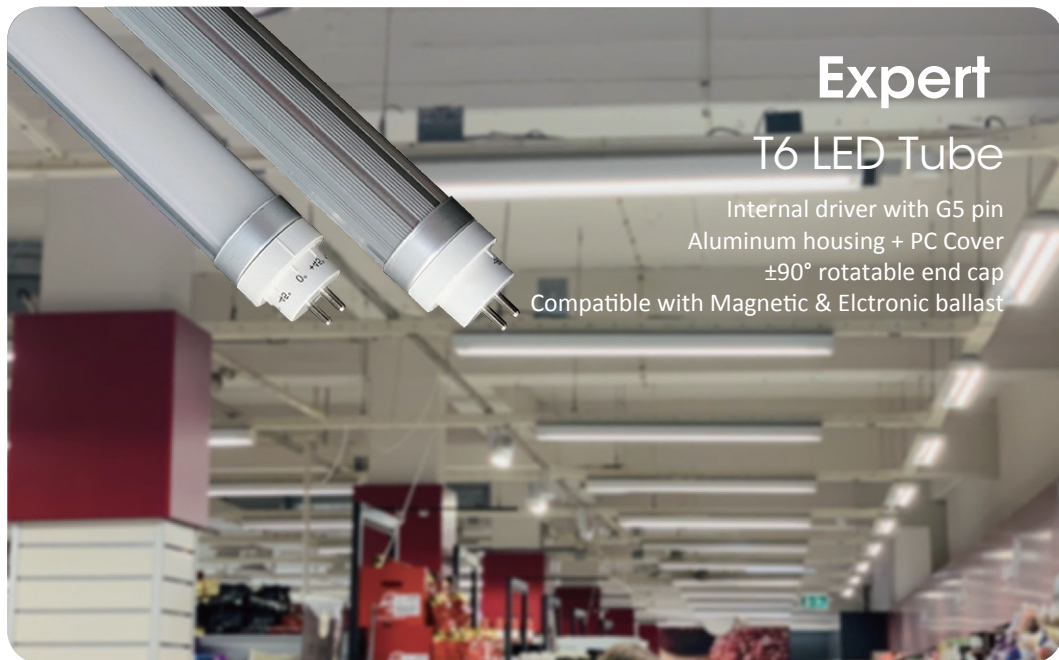

Expert


T6 LED Tube

Internal driver with G5 pin
Aluminum housing + PC Cover
±90° rotatable end cap
Compatible with Magnetic & Electronic ballast



SL-T62X10-108-X

10 Watts	549*Ø23.5mm
120lm/w	1200lm
150lm/w	1500lm



SL-T65X22-264-X

22 Watts	1449*Ø23.5mm
120lm/w	2640lm
150lm/w	3300lm



SL-T64X20-240-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm

SL-T65X25-288-X

20 Watts	1149*Ø23.5mm
120lm/w	2400lm
150lm/w	3000lm



T5 Integrated LED Tube

Aluminum housing + PC Cover

Integrated structure

Internal drive

Linkable / tool-free



SL-T52X-10-54-XT

10 Watts	60*23mm
120lm/w	1200lm
140lm/w	1400lm



SL-T53X-15-72-XT

15 Watts	90*23mm
120lm/w	1800lm
140lm/w	2100lm

SL-T54X-20-120-XT

20 Watts	120*23mm
120lm/w	2400lm
140lm/w	2800lm


SL-T55X-25-144-XT

25 Watts	150*23mm
120lm/w	3000lm
140lm/w	3500lm



UFO Highbay Light

CE, RoHS certificate
 NO UV& IR thermal radiation, Hg-Free
 IP65 waterproof, Anti-corrosion
 160lm/w $\pm$ 10%, Flicker free driver
 High-quality Aluminum housing + Ultra-clear lens
 L80B10(Ta=25 °C)>50,000hrs

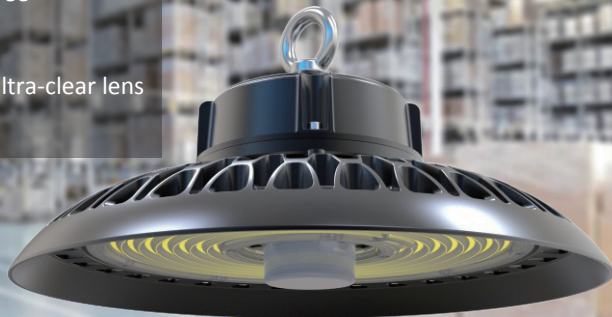

SL-U65BB-60-X(E)

60 Watts Φ 290*H176mm
 160lm/w 9600lm




SL-U65BB-100-X(E)

100 Watts Φ 290*H176mm
 160lm/w 16000lm



SL-U65BB-120-X(E)

120 Watts Φ 340*H189mm
 160lm/w 19200lm



SL-U65BB-150-X(E)

150 Watts Φ 340*H189mm
 160lm/w 24000lm



SL-U65BB-200-X(E)

200 Watts Φ 380*H191mm
 160lm/w 32000lm



SL-U65BB-240-X(E)

240 Watts Φ 380*H191mm
 160lm/w 38400lm



LED Flood Light

IP65,outdoor usage

Tempered glass

Respirator

Up to 140lm/w



SL-F65BD-10-X

10 Watts

120lm/w

1200lm

SL-F65BD-20-X

20 Watts

120lm/w

2400lm

SL-F65BD-30-X

30 Watts

120lm/w

3600lm

SL-F65BD-50-X

50 Watts

130lm/w

6500lm

SL-F65BD-80-X

80 Watts

130lm/w

10400lm

SL-F65BD-100-X

100 Watts

130lm/w

13000lm

SL-F65BD-150-X

150 Watts

130lm/w

19500lm

SL-F65BD-200-X

200 Watts


130lm/w

26000lm



Arealux Stadium Light

IP65 & IK10 Grading
Thunder&Surge protection
Strong thermal conductivity
High heat dissipation efficiency
Lens angle: 60°/20°
Customizable lens angles: 90°/40°/30°/10°




SL-0200-D60

200 Watts

120lm/w

24000lm




SL-0400-D60

400 Watts

120lm/w

48000lm



SL-0600-D20

600 Watts

120lm/w

72000lm

SL-0800-D20

800 Watts

120lm/w

96000lm

SL-1200-D20

1200 Watts

120lm/w

144000lm




Smart Control System

Memory function

IP65 rating

Single lamp control or multi-group control
Dimming & CCT spectrum control for Timing setting
Support 0-10V, PWM dimming power supply
Sunrise and sunset lighting mode Simulation



SL-IFC1000





240*240*80mm (9.45*9.45*3.15 inch)

AC100-240V / 0.1-1A

Output Requirement: PWM/0-10V

Standby Power <1Watt



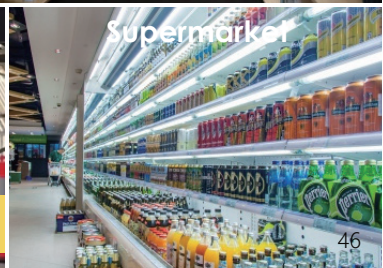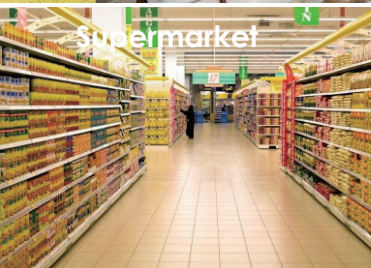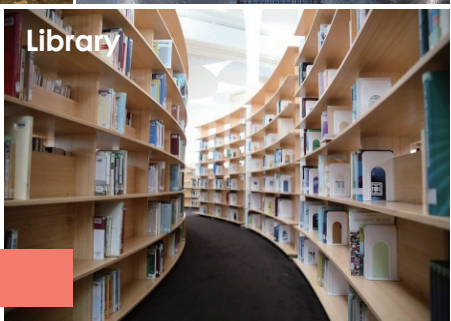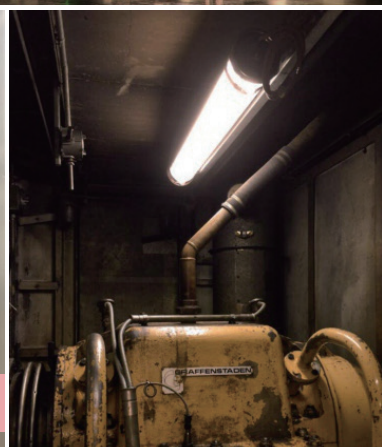



Quality Defender Original Designer

SHINELONG TECHNOLOGY CORP., LTD.

✉ sales@shinelongled.com

☎ +86-755-8520 3899

📱 [shinelongled](https://www.shinelongled.com)

🏠 www.shinelongled.com

📍 A901, B902, BLDG. 4, Baolong Intelligent Industry Park, Xinnengyuan 1 Rd, Baolong, Longgang District, Shenzhen, China. 518116



Scan me get updates